Instruction Manual

SSB Retractor Stroke 60/120 Air-to-Spring

Covering
- Standard Machines
- Hastelloy Machines
- Machines delivered with ATEX Certification in accordance with Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20

IM-TE91A900-EN3
ESE02195EN
Date of issue: November 12, 2015
First published: January 19, 2012

Original manual

Contents

Introduction 3
Intended Use 4
Patents and trademarks 4
ATEX Marking 5
Design Overview 5
Applications 6
Options 6
SSB Retractor Unit in extended position 7
Accessories 8
Proximity Sensor, data sheet 10
- Article no. TE75P507 10
- Article no. TE75P596-70 11

Technical Data 12
- Standard machines, stainless steel 12
- Standard machines, Hastelloy 13
- Connections 13
- Available add-ons 14

Flow Rate Data 15
Installation dimensions and connections 16
- Dimensions for SSB Retractor 120 Air-Spring 17

Installation 19
- General Safety and Installation Instructions 20
- Special Conditions for Safe Use in accordance with the ATEX Certification 21

Warnings 25
- Fluid and air connections 25
- Important recommendation for installation 25

Service and Repair of ATEX Certified Machines 26
Recommended Service Intervals 27
Parts Lists and Drawings 28
- Parts drawing for SSB Retractor 60 Air-Spring 28
- List of Parts for SSB Retractor 60 Air-Spring 29
- List of Parts for SSB Retractor 60 Air-Spring, Hastelloy 30
- Parts drawing for SSB Retractor 120 Air-Spring 32
- List of Parts for SSB Retractor 120 Air-Spring 33
- List of Parts for SSB Retractor 120 Air-Spring, Hastelloy 34

Maintenance 35
- Dismantling the Unit for Inspection 35

Re-Build & fitment of New Service Repair Kit 44
Standard Service Kits and Tools 58

General information 60
How to Order Spare Parts 60
Service and Repair 60
How to contact Alfa Laval Tank Equipment 60
EC/EU Declaration of Conformity 61
ATEX-Special Conditions for safe use 62

Introduction

The SSB Retractor is a pneumatically operated targeted spray ball which has been designed to achieve fast effective cleaning of all equipment used in the production process, including Ductwork, Vent Lines, Cyclones and many other applications where access is impossible

This manual has been prepared as a guide for the persons who will be operating and maintaining your tank cleaning machine. The key to long life for your tank cleaning machine will always be a system of carefully planned maintenance; you will appreciate that a tank cleaning machine which has a rough and dirty job to do will need more frequent attention than one working in ideal conditions.

It is in your own interest to get the best and most economical performance from your tank cleaning machine. Neglect of maintenance means poor performance, unscheduled stoppages, shorter life and expense. Good maintenance means good performance; no unscheduled stoppages and better total economy.

You will find the information contained in this manual simple to follow, but should you require further assistance, our Customer Service Department and world-wide net of Distributors will be pleased to help you. Please quote the type and serial number with all your enquiries; this will help us to help you.

The serial number is placed on the side of the body of the tank cleaning machine.

Note: The illustrations and specifications contained in this manual were effective at the date of printing. However, as continuous improvements are our policy, we reserve the right to alter or modify any unit specification on any product without prior notice or any obligation.

© Alfa Laval Corporate AB
This document and its contents is owned by Alfa Laval Corporate AB and protected by laws governing intellectual property and thereto related rights. It is the responsibility of the user of this document to comply with all applicable intellectual property laws. Without limiting any rights related to this document, no part of this document may be copied, reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the expressed permission of Alfa Laval Corporate AB. Alfa Laval Corporate AB will enforce its rights related to this document to the fullest extent of the law, including the seeking of criminal prosecution.

Intended Use

It is to be verified by the end-user:

- that the tank cleaning machine is in conformity with respect to tank, vessel, container or duct size in which it will be used.
- that the construction materials (both metallic and non-metallic) are compatibility with product, flushing media, cleaning media, temperatures and pressure under the intended use.

Patents and trademarks

This Instruction Manual is published by Alfa Laval Kolding A/S without any warranty. Improvements and changes to this Instruction Manual may at any time be made by Alfa Laval Kolding A/S without prior notice. Such changes will, however, be incorporated in new editions of this Instruction Manual.

© Alfa Laval Kolding A/S. All rights reserved.

The Alfa Laval logotype is a trademark or a registered trademark of Alfa Laval Corporate AB. "Toftejorg" is a trademark or registered trademark of Alfa Laval Kolding A/S. Other products or company names mentioned herein may be the trademarks of their respective owners. Any rights not expressly granted herein are reserved

If ordered with ATEX certificate:
ATEX Marking

The SSB Retractor 60/120 Air-to-Spring is certified as category I components. The certification is carried out by the certified body Baseefa, who has issued the certificate Baseefa 06ATEX0292X. The marking on the ATEX certified SSB Retractor 60/120 Air-to-Spring is as follows:

Note:

TE75P230-04, TE75P231-04, TE75P250-04, TE75P251-04, TE75Q230-04, TE75Q231-04, TE75Q250-04 & TE75Q251-04
These machines are approved for 180°C max: Tamb -10°C to +180°C.

Changes to the machine are not allowed without approval by the person responsible for the ATEX certification at Alfa Laval Tank Equipment. If changes are made – or spare parts other than Alfa Laval original spare parts are used - the EC Type Examination certification (the ATEX Directive) is no longer valid.

Important ATEX information:	Also see page 26 regarding special conditions for repair of ATEX certified machines.

Design Overview

The unit has been specifically designed to ensure good self draining so that there is no hold up of cleaning media after operation; this is achieved by a sealed cleaning housing and telescopic actuation and air cylinder design which ensures the minimum surface area becomes wetted. No media enters the spring chamber. After operation the SSB Retractor can be held open pneumatically while the spray stem self drains before closure by the return spring. This provides the opportunity to purge the spray stem if required.

Applications

The SSB Retractor can be used to clean from simple tanks and ductwork, to complex process applications with agitators where it is not possible to use fixed spray balls. Applications such as Storage Tanks, Reactors, Mixers and Spray Dryers including Ductwork and Vent Lines can all be cleaned by use of one or multiple SSB Retractor units.

ATEX Warning:	The speed at which the Sprayball is deployed (extended to the open position) must not exceed 0.5m/s. Ensure that the control air pressure is regulated to 4 bar max.

Options

The units are available in a range of operating strokes. As standard there are two sizes of SSB Retractor—60mm and 120mm. However, both units can be adjusted during manufacture by increments of 10mm. This allows the units to be fine tuned to accurately position the spray ball optimising the effectiveness.

As standard the units are available with all machined components in 316L Stainless Steel and standard seals in EPDM and Carbon filled PTFE. However, the units are available with product wetted components in Hastelloy C22 and seals manufactured from FFKM (Perfluorolastomer) should the environment require.

The spray balls are offered with standard spray patterns or can be target drilled to direct cleaning to certain features such as access covers etc.

SSB Retractor Unit in extended position

Figure 1 SSB, extended position

Accessories

Proximity sensors can be used to indicate if the SSB Retractor unit is either fully open, fully closed or both.

Alfa Laval offers supply of proximity sensors for subsequent assembly.

ATEX Warning:	If Proximity sensors are fitted the SSB Retractor, the assembler or the end user is fully responsible for the assembly and the associated risk assessment and ATEX approval.

If this option is required, two sensors will be required for each position.

Standard sensor	:	TE75P507
ATEX sensor	:	TE75P596-70

If the SSB Retractor is being ordered with ATEX Certification it is important to note that if a sensor is fitted the ATEX Category & Zone in which the SSB Retractor can be used will be effected.

The SSB Retractor is ATEX Category 1 but if sensors are fitted the unit will assume the lower ATEX rating of the Proximity Sensor.

If sensors are required for an ATEX environment please consult Alfa Laval.

ATEX Warning:	It is important to note that the SSB Retractor is ATEX Category 1 for installations in zone 0/20. However, if Proximity sensors are fitted, the overall ATEX rating of the SSB Retractor will assume the lower ATEX rating of the proximity sensor.

ATEX Warning:	It is important to note that if the SSB Retractor is fitted with ATEX sensor, it is necessary to validate it with the installation.

- Intentionally blank -

Proximity Sensor, data sheet

Article no. TE75P507

Proximity Sensor

Electric, with reed contact, for drives with T-slot, with cable, without LED, heat resistant design.



Data sheet

Feature	values
Design	for T-slot
Conforms to standard	EN 60947-5-2
Materials note	Free of copper and PTFE Conforms to RoHS
Measuring principle	Reed magnetic
Ambient temperature	-40 ... 120 °C
Switch output	with contact, bipolar
Switching element function	Normally open contact
Reproducibility of switching value	+/- 0,1 mm
Switch-on time	<= 0,5 ms
Switch-off time	<= 0,03 ms
Max. switching frequency	800 Hz
Max. output current	500 mA
Max. contact rating AC	10 VA
Max. contact rating DC	10 W
Voltage drop	<= 0 V
Short circuit strength	No
Overload withstand capability	Not available
Operating voltage range AC	0 ... 30 V
Operating voltage range DC	0 ... 30 V
Polarity protected	No
Electrical connection	Cable 2-core
Connector exit direction	axial
Cable length	2,5 m
Materials information, cable sheaths	TPE-S
Mounting type	Clamped in T-slot Insertable into slot lengthwise
Tightening torque	0,2 Nm
Product weight	50 g
Materials information, housing	Epoxy resin PC PET High alloy steel, non-corrosive
Ambient temperature with flexible cable installation	-5 ... 120 °C
Protection class	IP67
Insulation voltage	50 V
Surge strength	0,8 kV
Degree of contamination	3

Proximity Sensor, data sheet

Article no. TE75P596-70

Proximity Sensor

Electric, contactless, NPN, two wire Namur design, for drives with T-slot, assembly from above, with cable.





Data sheet

Feature	values
Design	for T-slot
Conforms to standard	EN 60947-5-6
Authorisation	C-Tick
CE mark (see declaration of conformity)	to EU directive for EMC to EU directive explosion protection (ATEX)
ATEX category Gas	II 1G
Explosion ignition protection type Gas	Ex ia IIC T4...T6
ATEX category Dust	II 1D
Explosion ignition protection type Dust	Ex iaD 20 IP67 T95°C
Explosion protection certification outside the EU	GOST-R EPL Ga
Explosion-proof ambient temperature	-10°C <= Ta <= +70°C
Certificate issuing department	KEMA 04 ATEX 1114 X
Materials note	Free of copper and PTFE
Measuring principle	Magnetic inductive
Ambient temperature	-25 ... 70 °C
Switch output	NAMUR
Switching element function	NAMUR
Reproducibility of switching value	+/- 0,1 mm
Switch-on time	<= 0,5 ms
Switch-off time	<= 0,5 ms
Max. output current in Namur operating mode	4,5 mA
Residual current	< 0,7 mA
Short circuit strength	for all electrical connections
Nominal operating voltage DC	8,2 V
Polarity protected	for all electrical connections
Electrical connection	Cable 2-core
Cable length	5 m
Materials information, cable sheaths	PVC
Mounting type	Clamped in T-slot
Assembly position	Any
Product weight	70 g
Materials information, housing	PA
Operating status display	Yellow LED
Ambient temperature with flexible cable installation	-5 ... 70 °C
Protection class	IP65 IP67

Technical Data

Standard machines, stainless steel

Toftejorg SSB Retractor Air-Spring Stroke 60

Model /Article No.		TE75P230 TE75P250	TE75P230-04 TE75P250-04
Weight of Unit	:	2.2kg	2.2kg
Operating Air Pressure	:	3.5-4 bar (50-58 psi)	3.5-4 bar (50-58 psi)
Cleaning Fluid Pressure	:	2 - 4 bar (29 - 58 psi)	2 - 4 bar (29 - 58 psi)
Flow Rate Approx.	:	2.8m³ / h at 3 bar	2.8m³ / h at 3 bar
Max. Cleaning Fluid temp.	:	95º C (203 deg F)	95º C (203 deg F)
Max. Process temp.	:	140º C (284 deg F)	180º C (356 deg F)
Ambient temp.	:	-10°C to +140°C (95º C – 140°C - when **not** operated)	-10°C to +180°C (95º C – 180°C - when **not** operated)

Toftejorg SSB Retractor Air-Spring Stroke 120

Model /Article No.		TE75P231 TE75P251	TE75P231-04 TE75P251-04
Weight of Unit	:	3.8kg	3.8kg
Operating Air Pressure	:	3.5-4 bar (50-58 psi)	3.5-4 bar (50-58 psi)
Cleaning Fluid Pressure	:	2 - 4 bar (29 - 58 psi)	2 - 4 bar (29 - 58 psi)
Flow Rate Approx.	:	2.8m³ / h at 3 bar	2.8m³ / h at 3 bar
Max. Cleaning Fluid temp.	:	95º C (203 deg F)	95º C (203 deg F)
Max. Process temp.	:	140º C (284 deg F)	180º C (356 deg F)
Ambient temp.	:	-10°C to +140°C (95º C – 140°C - when **not** operated)	-10°C to +180°C (95º C – 180°C - when **not** operated)

Materials

Components	:	Stainless Steel 316L	Stainless Steel 316L
Spring	:	Stainless Steel 301S81	Stainless Steel 301S81
Seals	:	EPDM, Carbon Filled PTFE	FFKM (Perfluorolastomer), Carbon Filled PTFE
Gaskets	:	PTFE	PTFE

Technical Data (continued)

Standard machines, Hastelloy

Model /Article No.		Stroke 60 TE75Q230-04 TE75Q250-04	Stroke 120 TE75Q250-04 TE75Q251-04
Operating Air Pressure	:	3.5-4 bar (50-58 psi)	3.5-4 bar (50-58 psi)
Cleaning Fluid Pressure	:	2 - 4 bar (29 - 58 psi)	2 - 4 bar (29 - 58 psi)
Flow Rate Approx.	:	2.8m³ / h at 3 bar	2.8m³ / h at 3 bar
Max. Cleaning Fluid temp.	:	95º C (203 deg F)	95º C (203 deg F)
Max. Process temp.	:	180º C (356 deg F)	180º C (356 deg F)
Ambient temp.	:	-10°C to +180°C (95º C – 180°C - when **not** operated)	-10°C to +180°C (95º C – 180°C - when **not** operated)

Materials

Components	:	Stainless Steel 316L, Hastelloy C22	Stainless Steel 316L, Hastelloy C22
Spring	:	Stainless Steel 301S81	Stainless Steel 301S81
Seals	:	EPDM, Carbon Filled PTFE	FFKM (Perfluorolastomer), Carbon Filled PTFE
Gaskets	:	PTFE	PTFE

Connections

Air Connection	:	⅛” BSP Parallel—internal thread is fitted as Standard with 6mm outside diameter push fit Connector.
Cleaning Media Connection	:	1" ISO Flange
Vessel Mounting	:	2" ISO Flange
Body Tube Joints	:	Flanged/Clamped to DIN 40 (DIN 32676)

Technical Data (continued)

Available add-ons

Available add-ons (documentation) for SSB Retractor 60 Air-Spring: TE75P230, TE75P230-04, TE75P250 & TE75P250-04:

TE75P2X0-70 EPDM + ATEX
TE75P2X0-80 EPDM + ATEX + 3.1 cert.
TE75P2X0-90 EPDM + 3.1 cert.
TE75P2X0-74 FFKM + ATEX
TE75P2X0-84 FFKM + ATEX + 3.1 cert.
TE75P2X0-94 FFKM + 3.1 cert.

Available add-ons (documentation) for SSB Retractor 120 Air-Spring: TE75P231, TE75P231-04, TE75P251 & TE75P251-04:

TE75P2X1-70 EPDM + ATEX
TE75P2X1-80 EPDM + ATEX + 3.1 cert.
TE75P2X1-90 EPDM + 3.1 cert.
TE75P2X1-74 FFKM + ATEX
TE75P2X1-84 FFKM + ATEX + 3.1 cert.
TE75P2X1-94 FFKM + 3.1 cert.

Available add-ons (documentation) for Hastelloy SSB Retractor 60 Air-Spring: TE75Q230-04, TE75Q250-04 :

TE75Q2X0-04 FFKM
TE75Q2X0-74 FFKM + ATEX
TE75Q2X0-84 FFKM + ATEX + 3.1 cert.
TE75Q2X0-94 FFKM + 3.1

Available add-ons (documentation) for Hastelloy SSB Retractor 120 Air-Spring: TE75Q231-04, TE75Q251-04 :

TE75Q2X1-04 FFKM
TE75Q2X1-74 FFKM + ATEX
TE75Q2X1-84 FFKM + ATEX + 3.1 cert.
TE75Q2X1-94 FFKM + 3.1

Explanation to Add-on´s:

ATEX includes:

ATEX approved machine for use in explosive atmospheres. Category 1 for installation in zone 0/20 in accordance to Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20. Ex II 1GD c TX°C Tamb -10°C to +140°C or Ex II 1GD c TX°C Tamb -10°C to +180°C.

Flow Rate Data

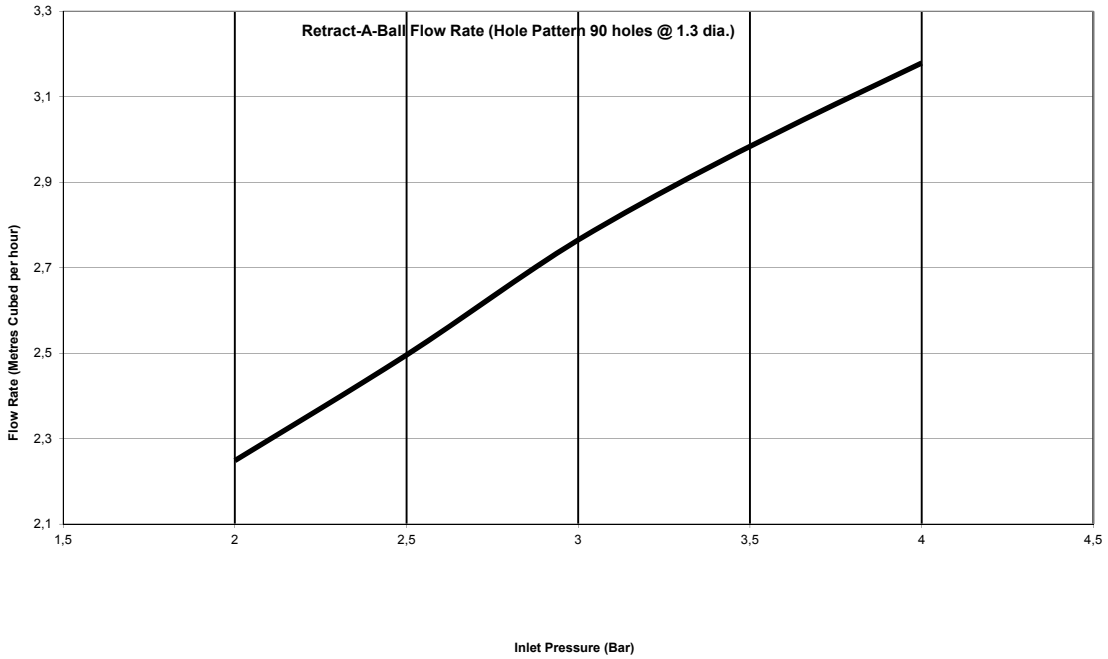

The above Flow Chart shows the typical flow rate through the SSB Retractor fitted with a standard spray ball with 90 holes at 1.3mm dia.

Flow Rates can be changed by different drilling patterns if required.

Installation dimensions and connections

Dimensions for SSB Retractor 60 Air-Spring

TE75P230, TE75P230-04, TE75P250, TE75P250-04, TE75Q230-04 & TE75Q250-04

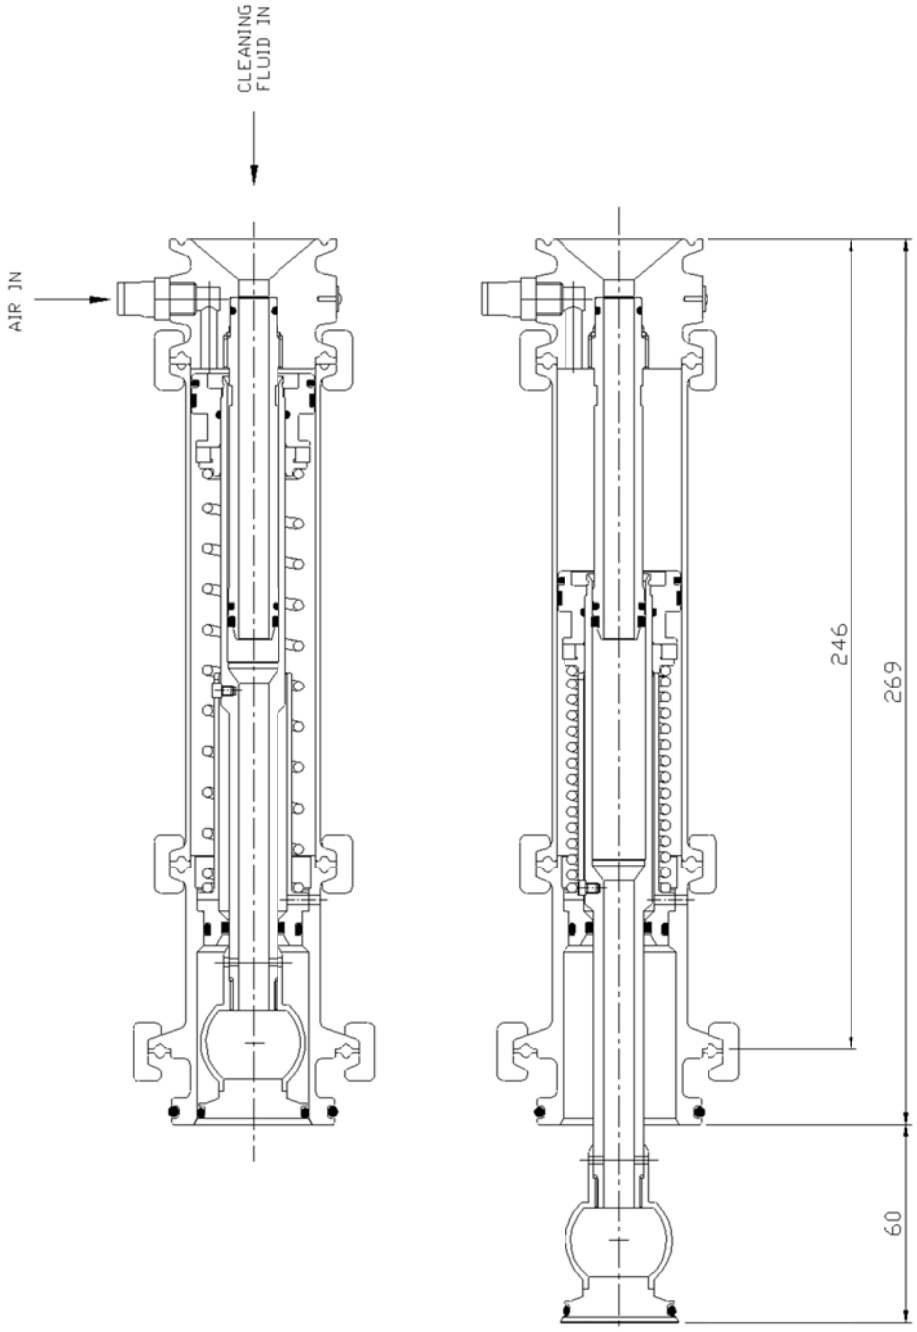

Figure 2 Dimensions SSB Retractor 60 Air-Spring

Installation dimensions and connections

Dimensions for SSB Retractor 120 Air-Spring

TE75P231, TE75P231-04, TE75P251, TE75P251-04, TE75Q231-04 & TE75Q251-04

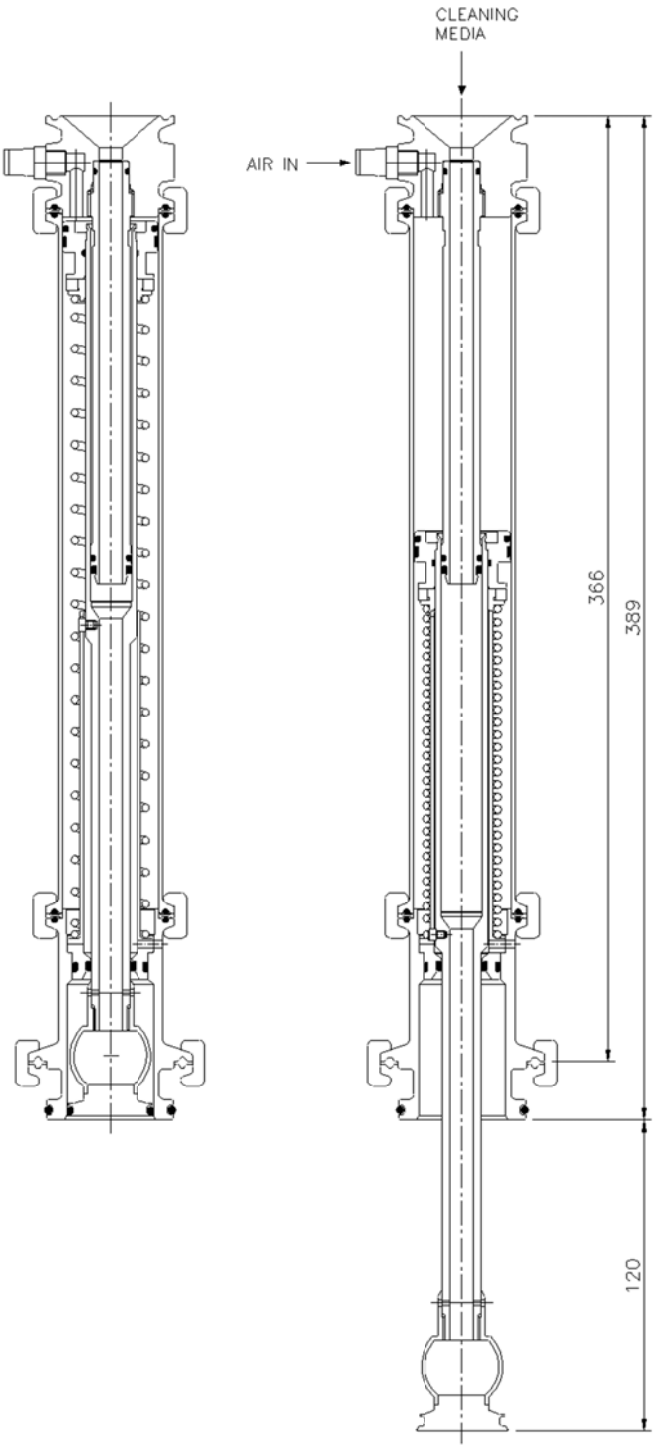

Figure 3 Dimensions SSB Retractor 120 Air-Spring

Installation dimensions and connections

NOTES:

1.MATERIALS:	MACHINED COMPONENTS: STAINLESS STEEL - GRADE 316L,, HASTELLOY C22
2. SEALS:	MACHINED CARBON FILLED PTFE, EPDM or FFKM O-RINGS
3. SPRING:	STAINLESS STEEL - GRADE 301S81
	(NON-WETTED)
4. BODY JOINTS:	DIN 40 FLANGES.
	DESIGNED IN ACCORDANCE WITH DIN 32676. (SAFETY CLAMPS)
5. PRESSURES:	CONTROL AIR: 3.5-4 bar (50-58 psi) CLEANING LIQUID: 2-4 bar (29-58 psi)
6. TEMPERATURES:	CLEANING LIQUID: 95°C (203°f) MAX PROCESS:140°C (284°f)
7. AIR CONNECTION:	1/8" BSP PARALLEL INTERNAL THREAD, FITTED AS STANDARD WITH 6MM OUTSIDE DIA.PUSH FIT CONNECTOR.
8. LIQUID CONNECTION:	1" ISO FLANGE
9. BODY MOUNTING:	2" ISO FLANGE

Figure 4 Connections

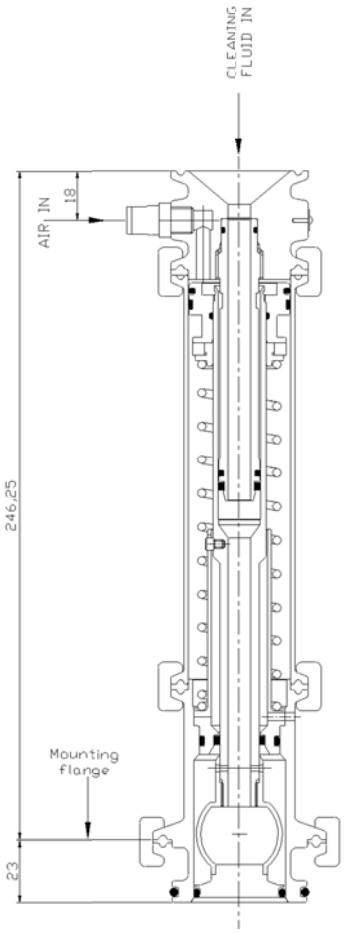

SSB Retractor 60

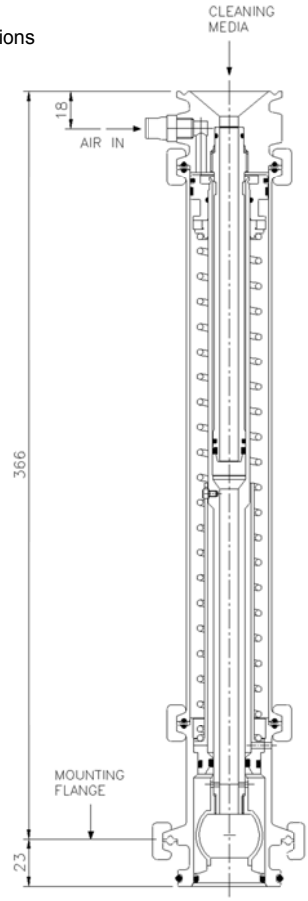

SSB Retractor 120

Installation

The SSB Retractor is mounted to a 2" ISO Ferrule using the 2" ISO gasket and clamp supplied. The unit must be mounted so that it is a minimum for 5° above horizontal. This is important to allow the Home Chamber to drain when cleaning has finished. See Figure 5.

Image Shows unit mounted to a vertical duct.

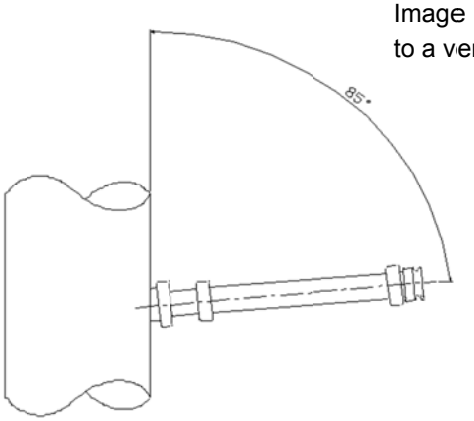

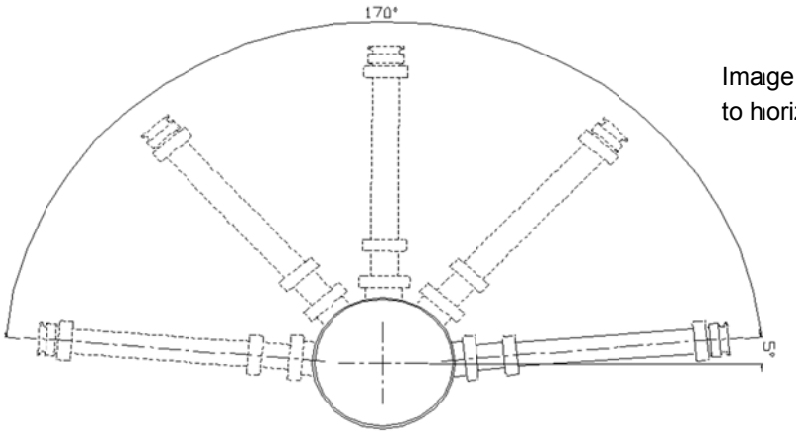

Image shows unit mounted to horizontal duct.

Figure 5 Installation

Installation (continued)

General Safety and Installation Instructions

Note: The machine shall be installed in accordance with national regulations for safety and other relevant regulations and standards.
Precautions shall be made to prevent starting of the cleaning operation, while personnel are inside the tank or otherwise can be hit by jets from the nozzles.
In EU-countries the complete system must fulfil the EU-Machine Directive and depending of application, the EU-Pressure Equipment Directive, the EU-ATEX Directive and other relevant Directives and shall be CE-marked before it is set into operation.

ATEX Warning:

If the machine is used in potential explosive atmospheres, tapes or joint sealing compounds which are electrical insulators must not be used on threads or joints, unless an electrical connection is otherwise established to ensure an effective earthing. In addition, connecting pipe work, must be electrically conductive and earthed to the tank structure. The resistance between the nozzles and the tank structure should not exceed 20,000 Ohm. This is essential to avoid the build-up of static electricity on the machine.

For further information see IEC/TS 60079-32-1:2013, guidance and recommendations for the avoidance of hazards due to static electricity.

Electrical equipment such as magnetic valves and electric actuators must not be installed in Ex-zones without type approval and marking, corresponding to the EX-class in question.

Installation (continued)

Special Conditions for Safe Use in accordance with the ATEX Certification

Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20

ATEX Warning:	The unit shall be connected to a fully earthed pipeline/duct or tank/vessel.

ATEX Warning:	The air operated unit shall only be operated with inert gas or clean air.

ATEX Warning:	The unit shall only be purged with inert gas or clean air

In addition to the above mentioned precautions relating to the ATEX guidelines Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20, the Safety Precautions on 20 must be observed.

Installation (continued)

Special Conditions for Safe Use in accordance with the ATEX Certification

Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20

ATEX Warning:	Do not allow the unit to be operated when process media is in the pipeline or tank.

ATEX Warning:	Do not allow the air pressure to exceed 5.5 bar.

ATEX Warning:	Do not allow the cleaning media to exceed 4 bar.

ATEX Warning:	When an external sensor is fitted to indicate the open or closed position it shall be suitable for the zone in use.

ATEX Warning:	The pipeline/duct shall not exceed a diameter of 3m, and the tank/vessel shall not exceed 100m³.

In addition to the above mentioned precautions relating to the ATEX guidelines Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20, the Safety Precautions on 20 must be observed.

Installation (continued)

Special Conditions for Safe Use in accordance with the ATEX Certification

Directive 94/9/EC valid until 2016-04-19/Directive 2014/34/EU valid from 2016-04-20

Temperature

ATEX Warning:	Atmosphere/surface temperature: In potentially explosive atmospheres, the temperature must not exceed the maximum surface temperature according to the temperature class for the combustible gas or liquid.

ATEX Warning:	Steam cleaning: Tanks with capacities greater than 100 m^3 that could contain a flammable atmosphere should not be steam cleaned, as steam issuing from a nozzle could contain charged droplets. Tanks smaller than this may be steam cleaned providing that: the steam nozzles and other metal parts of the system are reliably earthed and grounded to the tank structure.

Pressure

Avoid hydraulic shocks. Increase pressure gradually. Do not exceed 4 bar inlet pressure. Recommended inlet pressure: 2-4 bar. High pressure in combination with high flow rate will increase consumption of wear parts. High pressure will also reduce the cleaning effect.

Installation (continued)

Orientation

As the Spray Ball on the SSB Retractor is often targeted it is important that the unit is installed in the correct orientation. The Spray balls are keyed to the Home Chamber. The Home Chamber has a roll pin fitted through its side. See Figure 6

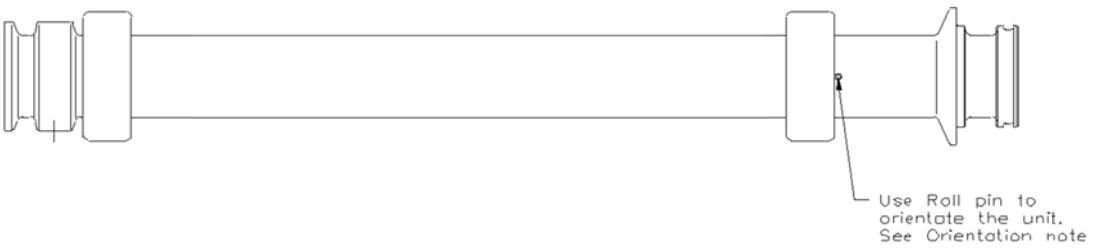

Figure 6 Installation orientation

Once the unit is mounted into the 2" ISO mounting ferrule it should be rotated so that the roll pin points parallel to the duct work to which it is mounted, before the mounting clamp is tightened. This will ensure the correct orientation for the Spray Ball.

In some instances the units may be specially drilled to target certain features or may not be mounted into ductwork. In these instances, the roll pin should again be used to orientate the unit but there will be an instruction enclosed with the unit to advise the direction the pin should point.

It is recommended that a filter with 0.5mm holes is fitted to the supply line.

Before connecting the Cleaning Media Pipe work to the unit it is recommended that the supply lines and valves should be flushed in order to remove any foreign particles.

Air Connection

A supply of dry, clean air is required to operate the SSB Retractor unit. The Inlet Adaptor has a 1/8" BSP FEMALE THREAD which is fitted as standard with a 6mm push fit fitting. The air pressure required is 3.5-4 bar.

Note: IT IS IMPORTANT THAT A NON-RETURN VALVE IS FITTED INTO THE AIR SUPPLY LINE. THIS IS IMPORTANT IN CASE THE AIR SEAL INSIDE THE SSB RETRACTOR SHOULD FAIL. THIS COULD ALLOW THE CLEANING MEDIA TO TRAVEL BACK THROUGH THE AIR LINE.

Installation (continued)

Cleaning Media

The media must be compatible with Stainless Steel 316L, Hastelloy C22, EPDM or FFKM and carbon filled PTFE. Normal detergents, moderate solutions of acids and alkaline are acceptable.

After Use Cleaning

After use the units should always be flushed with fresh water. Cleaning media should never be allowed to dry inside the unit due to possible 'salting out' or scaling of the cleaning media.

Warnings

Warning:

The unit is operated by compressed air. It is important that the operating pressure is released and isolated before any work is carried out on the unit.

The Body Tube Clamps **must not** be released until the air pressure is released and isolated.

The clamps used on the body of the unit are safety clamps and **cannot** come away from the unit if the clamping nut is accidentally slackened, however great care must be taken.

Fluid and air connections

The unit is supplied with both cleaning media (fluid) at pressure & also air to open the unit. Ensure that both supplies are fitted with a non return valve.

Important recommendation for installation

It is recommended that the media connection to the SSB Retractor is always by means of a flexible, not fixed, coupling/pipe work. This is important to ensure that there is no undue force applied to the unit which can cause internal misalignment and therefore damage.

Service and Repair of ATEX Certified Machines

All service and repair of ATEX certified machines can be performed by Alfa Laval Tank Equipment, Kolding, Denmark or by an Alfa Laval service center approved by Alfa Laval Tank Equipment.

ATEX Warning:

In order to ensure compliance with the ATEX regulations and keep the machine ATEX certification valid the service or repair must be performed by an authorized person with knowledge of the ATEX requirements and regulations.
All spare parts must be original Alfa Laval spare parts and the repair or service must be done according to the instructions in the related manual.

If a customer wishes to carry out service or repair himself, it is the responsibility of the repair shop to ensure that the ATEX requirements are met in any way possible. After performing service or repair, the repair shop thus carries the full responsibility for traceability of all relevant documents in order to ensuring the retention of the ATEX certification of the machine.

Recommended Service Intervals

Inspection every 500 working hours. After 2000 working hours: inspection every 200 hours.

An Inspection consists of: See page 35.

Parts Lists and Drawings

Parts drawing for SSB Retractor 60 Air-Spring

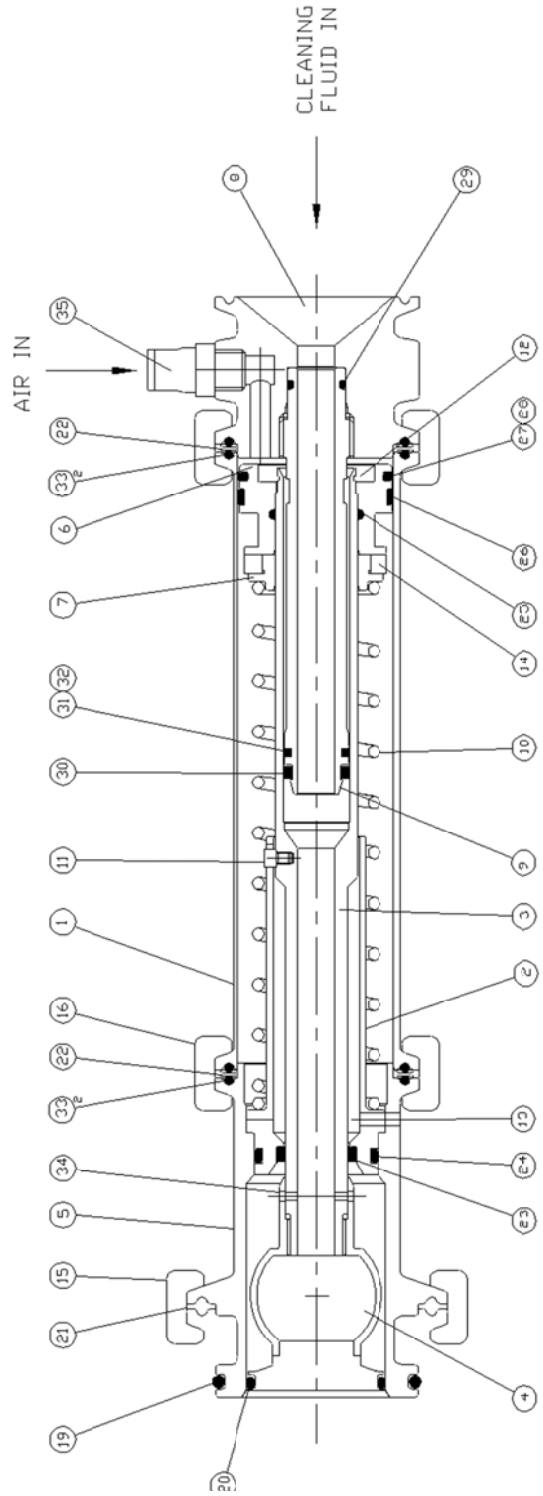

Figure 7 Components parts SSB Retractor 60 Air-Spring

Parts Lists and Drawings (continued)

List of Parts for SSB Retractor 60 Air-Spring

Model No.	**TE75P230**	**TE75P230-04**	**TE75P250**	**TE75P250-04**			
Pos.no.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Description	QTY	Remarks
1	TE75P527	TE75P527	TE75P527	TE75P527	Body Tube	1	Spare Part
2	TE75P558	TE75P558	TE75P558	TE75P558	Sleeve	1	Spare Part
3	TE75P559	TE75P559	TE75P559	TE75P559	Spray Stem	1	Spare Part
4	TE75P592	TE75P592	TE75P562	TE75P562	Spray ball assembly (drilled)	1	Spare Part
5	TE75P563	TE75P563	TE75P563	TE75P563	Housing 2" ISO	1	Spare Part
6	TE75P544	TE75P544	TE75P544	TE75P544	Piston	1	Spare Part
7	TE75P545	TE75P545	TE75P545	TE75P545	Piston Spacer	1	Spare Part
8	TE75P560	TE75P560	TE75P560	TE75P560	Inlet Adaptor	1	Spare Part
9	TE75P557	TE75P557	TE75P557	TE75P557	Adaptor Stem	1	Spare Part
10	TE75P561	TE75P561	TE75P561	TE75P561	Spring	1	Spare Part
11			TE75P502	TE75P502	Orientation Screw	1	Spare Part
12	TE75P587	TE75P587	TE75P587	TE75P587	Retaining Ring	1	Spare Part
13	TE75P552	TE75P552	TE75P552	TE75P552	Spring Pin	1	Spare Part
14	TE75P504	TE75P504	TE75P504	TE75P504	Magnet	1	Spare Part
15	TE75P505	TE75P505	TE75P505	TE75P505	Mounting Clamp 2" ISO	1	Spare Part
16	TE75P506	TE75P506	TE75P506	TE75P506	Body Clamp DIN 40	2	Spare Part
17							
18							
19	TE75P538	TE75P508	TE75P538	TE75P508	Home Chamber/Spigot Seal	1	Wear Part
20	TE75P539	TE75P509	TE75P539	TE75P509	Home Chamber/Stem Seal	1	Wear Part
21	TE75P550	TE75P550	TE75P550	TE75P550	Gasket-Home Chamber Mounting Flange	1	Spare Part
22	TE75P573	TE75P573	TE75P573	TE75P573	Solid Gasket Spacer Ring	2	Spare Part
23	TE75P543	TE75P543	TE75P543	TE75P543	Stem Product Seal	1	Wear Part
24	TE75P540	TE75P574	TE75P540	TE75P574	Home Chamber/Sleeve Seal	1	Wear Part
25	TE75P541	TE75P575	TE75P541	TE75P575	Piston/Stem Seal	1	Wear Part
26	TE75P514	TE75P514	TE75P514	TE75P514	Piston Slide Ring	1	Wear Part
27	TE75P515	TE75P515	TE75P515	TE75P515	Piston Seal	1	Wear Part
28	TE75P516	TE75P546	TE75P516	TE75P546	Energising O-Ring	1	Wear Part
29	TE75P542	TE75P576	TE75P542	TE75P576	Adaptor/Stem Seal	1	Wear Part
30	TE75P517	TE75P517	TE75P517	TE75P517	Adaptor Product Seal	1	Wear Part
31	TE75P518	TE75P518	TE75P518	TE75P518	Adaptor Air Seal	1	Wear Part
32	TE75P519	TE75P549	TE75P519	TE75P549	Energising O-Ring	1	Wear Part
33	TE75P511	TE75P511	TE75P511	TE75P511	O-Ring	4	Wear Part
34	TE75P555	TE75P555	TE75P555	TE75P555	Ball Securing Pin	1	Spare Part
35	TE75P523	TE75P523	TE75P523	TE75P523	Air Connector	1	Spare Part

Parts Lists and Drawings (continued)

List of Parts for SSB Retractor 60 Air-Spring, Hastelloy

Model no.	**TE75Q230-04**	**TE75Q250-04**			
Pos.no.	Ref. No.	Ref. No.	Description	QTY	Remarks
1	TE75P527	TE75P527	Body Tube	1	Spare Part
2	TE75P558	TE75P558	Sleeve	1	Spare Part
3	TE75P559	TE75P559	Spray Stem	1	Spare Part
4	TE75Q592	TE75Q562	Spray ball assembly (drilled)	1	Spare Part
5	TE75Q563	TE75Q563	Housing 2" ISO	1	Spare Part
6	TE75P544	TE75P544	Piston	1	Spare Part
7	TE75P545	TE75P545	Piston Spacer	1	Spare Part
8	TE75P560	TE75P560	Inlet Adaptor	1	Spare Part
9	TE75P557	TE75P557	Adaptor Stem	1	Spare Part
10	TE75P561	TE75P561	Spring	1	Spare Part
11		TE75P502	Orientation Screw	1	Spare Part
12	TE75P587	TE75P587	Retaining Ring	1	Spare Part
13	TE75P552	TE75P552	Spring Pin	1	Spare Part
14	TE75P504	TE75P504	Magnet	1	Spare Part
15	TE75P505	TE75P505	Mounting Clamp 2" ISO	1	Spare Part
16	TE75P506	TE75P506	Body Clamp DIN 40	2	Spare Part
17					
18					
19	TE75P508	TE75P508	Home Chamber/Spigot Seal	1	Wear Part
20	TE75P509	TE75P509	Home Chamber/Stem Seal	1	Wear Part
21	TE75P550	TE75P550	Gasket-Home Chamber Mounting Flange	1	Spare Part
22	TE75P573	TE75P573	Solid Gasket Spacer Ring	2	Spare Part
23	TE75P543	TE75P543	Stem Product Seal	1	Wear Part
24	TE75P574	TE75P574	Home Chamber/Sleeve Seal	1	Wear Part
25	TE75P575	TE75P575	Piston/Stem Seal	1	Wear Part
26	TE75P514	TE75P514	Piston Slide Ring	1	Wear Part
27	TE75P515	TE75P515	Piston Seal	1	Wear Part
28	TE75P546	TE75P546	Energising O-Ring	1	Wear Part
29	TE75P576	TE75P576	Adaptor/Stem Seal	1	Wear Part
30	TE75P517	TE75P517	Adaptor Product Seal	1	Wear Part
31	TE75P518	TE75P518	Adaptor Air Seal	1	Wear Part
32	TE75P549	TE75P549	Energising O-Ring	1	Wear Part
33	TE75P511	TE75P511	O-Ring	4	Wear Part
34	TE75P555	TE75P555	Ball Securing Pin	1	Spare Part
35	TE75P523	TE75P523	Air Connector	1	Spare Part

- Intentionally blank -

Parts Lists and Drawings (continued)

Parts drawing for SSB Retractor 120 Air-Spring

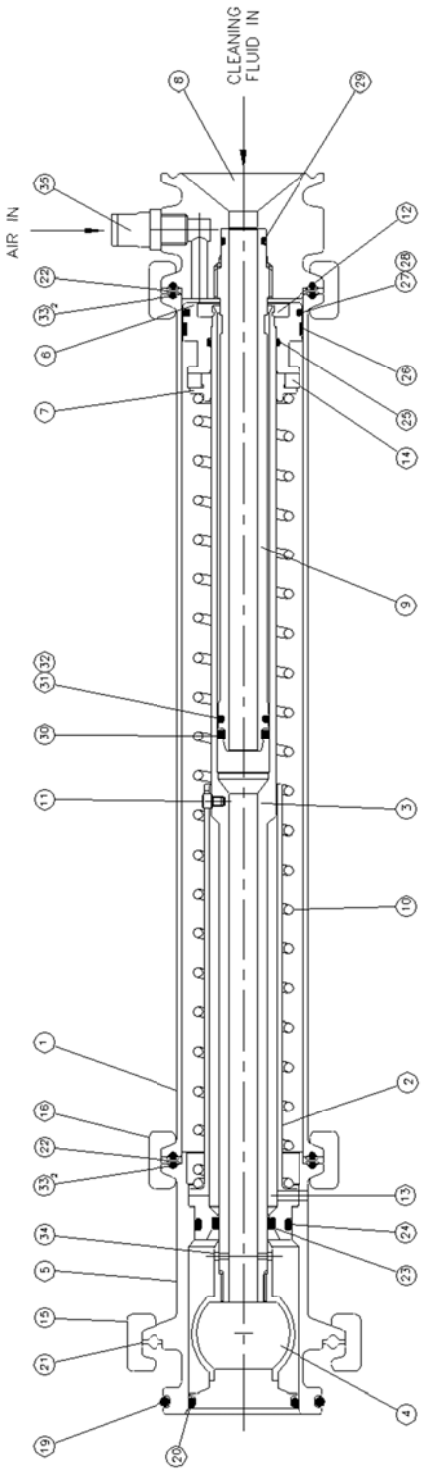

Figure 8 Components parts SSB Retractor 60 Air-Spring

Parts Lists and Drawings (continued)

List of Parts for SSB Retractor 120 Air-Spring

Model No.	TE75P231	TE75P231-04	TE75P251	TE75P251-04			
Pos.no.	Ref. No.	Ref. No.	Ref. No.	Ref. No.	Description	QTY	Remarks
1	TE75P526	TE75P526	TE75P526	TE75P526	Body Tube	1	Spare Part
2	TE75P569	TE75P569	TE75P569	TE75P569	Sleeve	1	Spare Part
3	TE75P570	TE75P570	TE75P570	TE75P570	Spray Stem	1	Spare Part
4	TE75P592	TE75P592	TE75P562	TE75P562	Spray ball assembly (drilled)	1	Spare Part
5	TE75P563	TE75P563	TE75P563	TE75P563	Housing 2" ISO	1	Spare Part
6	TE75P544	TE75P544	TE75P544	TE75P544	Piston	1	Spare Part
7	TE75P545	TE75P545	TE75P545	TE75P545	Piston Spacer	1	Spare Part
8	TE75P560	TE75P560	TE75P560	TE75P560	Inlet Adaptor	1	Spare Part
9	TE75P568	TE75P568	TE75P568	TE75P568	Adaptor Stem	1	Spare Part
10	TE75P572	TE75P572	TE75P572	TE75P572	Spring	1	Spare Part
11			TE75P502	TE75P502	Orientation Screw	1	Spare Part
12	TE75P587	TE75P587	TE75P587	TE75P587	Retaining Ring	1	Spare Part
13	TE75P552	TE75P552	TE75P552	TE75P552	Spring Pin	1	Spare Part
14	TE75P504	TE75P504	TE75P504	TE75P504	Magnet	1	Spare Part
15	TE75P505	TE75P505	TE75P505	TE75P505	Mounting Clamp 2" ISO	1	Spare Part
16	TE75P506	TE75P506	TE75P506	TE75P506	Body Clamp DIN 40	2	Spare Part
17							
18							
19	TE75P538	TE75P508	TE75P538	TE75P508	Home Chamber/Spigot Seal	1	Wear Part
20	TE75P539	TE75P509	TE75P539	TE75P509	Home Chamber/Stem Seal	1	Wear Part
21	TE75P550	TE75P550	TE75P550	TE75P550	Gasket-Home Chamber	1	Spare Part
22	TE75P573	TE75P573	TE75P573	TE75P573	Solid Gasket Spacer Ring	2	Spare Part
23	TE75P543	TE75P543	TE75P543	TE75P543	Stem Product Seal	1	Wear Part
24	TE75P540	TE75P574	TE75P540	TE75P574	Home Chamber/Sleeve Seal	1	Wear Part
25	TE75P541	TE75P575	TE75P541	TE75P575	Piston/Stem Seal	1	Wear Part
26	TE75P514	TE75P514	TE75P514	TE75P514	Piston Slide Ring	1	Wear Part
27	TE75P515	TE75P515	TE75P515	TE75P515	Piston Seal	1	Wear Part
28	TE75P516	TE75P546	TE75P516	TE75P546	Energising O-Ring	1	Wear Part
29	TE75P542	TE75P576	TE75P542	TE75P576	Adaptor/Stem Seal	1	Wear Part
30	TE75P517	TE75P517	TE75P517	TE75P517	Adaptor Product Seal	1	Wear Part
31	TE75P518	TE75P518	TE75P518	TE75P518	Adaptor Air Seal	1	Wear Part
32	TE75P519	TE75P549	TE75P519	TE75P549	Energising O-Ring	1	Wear Part
33	TE75P511	TE75P511	TE75P511	TE75P511	O-Ring	4	Wear Part
34	TE75P555	TE75P555	TE75P555	TE75P555	Ball Securing Pin	1	Spare Part
35	TE75P523	TE75P523	TE75P523	TE75P523	Air Connector	1	Spare Part

Parts Lists and Drawings (continued)

List of Parts for SSB Retractor 120 Air-Spring, Hastelloy

Model No.	**TE75Q231-04**	**TE75Q251-04**			
Pos.no.	Ref. No.	Ref. No.	Description	QTY	Remarks
1	TE75P526	TE75P526	Body Tube	1	Spare Part
2	TE75P569	TE75P569	Sleeve	1	Spare Part
3	TE75P570	TE75P570	Spray Stem	1	Spare Part
4	TE75Q592	TE75Q562	Spray ball assembly (drilled)	1	Spare Part
5	TE75Q563	TE75Q563	Housing 2" ISO	1	Spare Part
6	TE75P544	TE75P544	Piston	1	Spare Part
7	TE75P545	TE75P545	Piston Spacer	1	Spare Part
8	TE75P560	TE75P560	Inlet Adaptor	1	Spare Part
9	TE75P568	TE75P568	Adaptor Stem	1	Spare Part
10	TE75P572	TE75P572	Spring	1	Spare Part
11		TE75P502	Orientation Screw	1	Spare Part
12	TE75P587	TE75P587	Retaining Ring	1	Spare Part
13	TE75P552	TE75P552	Spring Pin	1	Spare Part
14	TE75P504	TE75P504	Magnet	1	Spare Part
15	TE75P505	TE75P505	Mounting Clamp 2" ISO	1	Spare Part
16	TE75P506	TE75P506	Body Clamp DIN 40	2	Spare Part
17					
18					
19	TE75P508	TE75P508	Home Chamber/Spigot Seal	1	Wear Part
20	TE75P509	TE75P509	Home Chamber/Stem Seal	1	Wear Part
21	TE75P550	TE75P550	Gasket-Home Chamber Mounting	1	Spare Part
22	TE75P573	TE75P573	Solid Gasket Spacer Ring	2	Spare Part
23	TE75P543	TE75P543	Stem Product Seal	1	Wear Part
24	TE75P574	TE75P574	Home Chamber/Sleeve Seal	1	Wear Part
25	TE75P575	TE75P575	Piston/Stem Seal	1	Wear Part
26	TE75P514	TE75P514	Piston Slide Ring	1	Wear Part
27	TE75P515	TE75P515	Piston Seal	1	Wear Part
28	TE75P546	TE75P546	Energising O-Ring	1	Wear Part
29	TE75P576	TE75P576	Adaptor/Stem Seal	1	Wear Part
30	TE75P517	TE75P517	Adaptor Product Seal	1	Wear Part
31	TE75P518	TE75P518	Adaptor Air Seal	1	Wear Part
32	TE75P549	TE75P549	Energising O-Ring	1	Wear Part
33	TE75P511	TE75P511	O-Ring	4	Wear Part
34	TE75P555	TE75P555	Ball Securing Pin	1	Spare Part
35	TE75P523	TE75P523	Air Connector	1	Spare Part

Maintenance

The units are designed to be self cleaning and should require very little or no maintenance between service intervals.

The units are a simple design with only the central telescopic bore being wetted. Performance will be effected by contamination from debris or particles where the CIP system is inadequately filtered or swarf in the system after installation.

Deterioration of the seals will also affect the unit's performance.

It is for this reason that it is recommended that the units are inspected every 500 working hours. After 2000 working hours inspect every 200 working hours.

A spares seal kit is available and does require simple tooling to fit the seals. The part No. for both the seal kit and Seal installation tools are listed in the Spare Parts section of this Manual on page 58.

Dismantling the Unit for Inspection

1. Always release the air pressure to the unit before disconnecting the air supply to the unit.
2. Remove the unit from its mounting so that the work can be carried out in the workshop. To remove the unit release the 2" ISO clamp which retains it to the 2" ISO mounting ferrule (it is the largest clamp on the unit). Carefully draw the unit from the ferrule ensuring that you retain the white PTFE gasket between the mounting ferrule and the head of the unit.
3. Slacken and remove the DIN 40 clamp which secures the Inlet adaptor to the main body tube. See Figure 9 below.

Figure 9 Dismantling

Maintenance (continued)

4. Carefully withdraw the Inlet Adaptor from the Main Body tube. Ensure to be careful & keep the Inlet Adaptor parallel with the Body Tube as it is withdrawn. Two seals will now be visible on the end of the inlet adaptor stem. The larger seal at the end of the inlet adaptor stem is the cleaning media seal and the second smaller seal is an air seal. Both should be examined to assess their condition. See Figure 10.

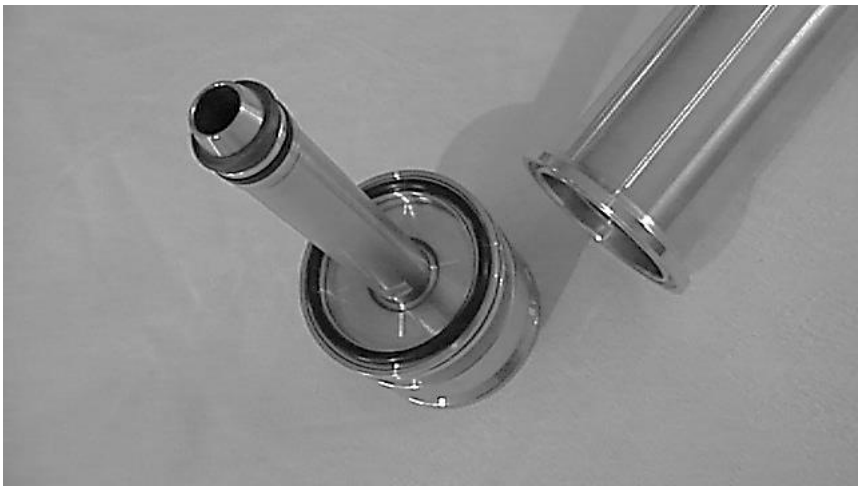

Figure 10

5. Between the Inlet Adaptor & the Body Tube there is a Solid Gasket Spacer Ring & two O-rings- See Figure 11below.
   The Solid Gasket Spacer Ring (TE75P573) should be retained & used for re-assembly. The two O-rings (TE75P511) should be replaced. See Figure 11 Below.

Figure 11

Maintenance (Continued)

6. Remove the second clamp between the Main Body tube and the Home Chamber and carefully slide the Body Tube from the Piston to reveal the spring. See Figure 12.

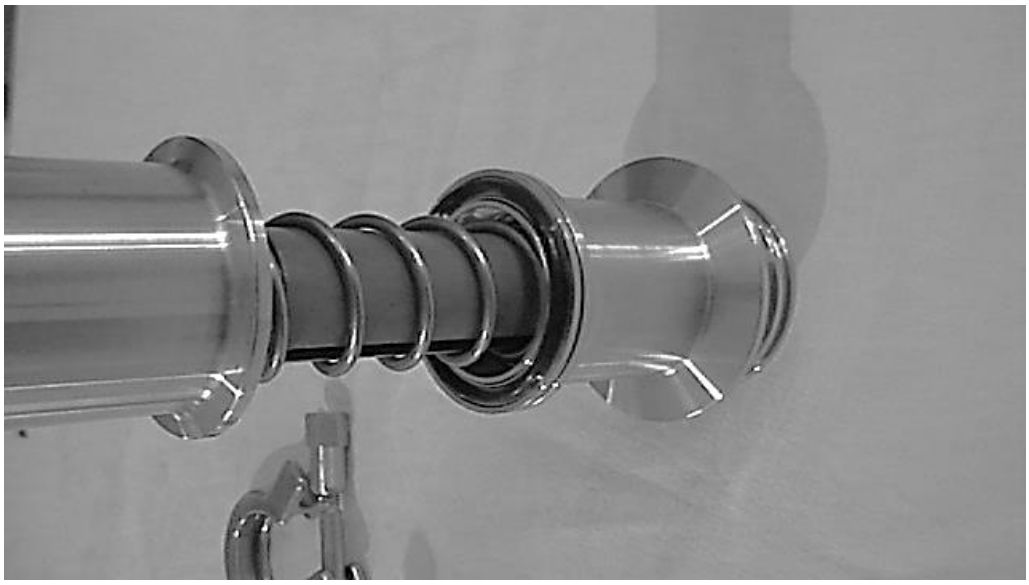

Figure 12

7. There is another Solid Gasket Spacer Ring & two O-rings between the Home Chamber & the Body Tube.
The Solid Gasket Spacer Ring (TE75P573) should be retained for re-assembly but the two O-rings (TE75P511) should be replaced. See Figure 13 below.

Figure 13

8. Once the Body Tube is removed the Piston Slide ring will fall away from the Piston. This is normal. See Figure 14.

Figure 14

9. **CAUTION:** To remove the Piston the Retaining Ring inside the recess of the Piston has to be removed. The Spring is under compression at this stage so the Piston must be held downwards as the Retaining Ring is removed to avoid the Piston being ejected by the spring. See Figure 15. When rebuilding the Unit a new Retaining Ring must be used.

Figure 15

Maintenance (continued)

10. The remaining seal visible on the Piston in Figure 16 is the Main Air Seal. This seal is a PTFE ring with an O-Ring underneath to energise the seal.

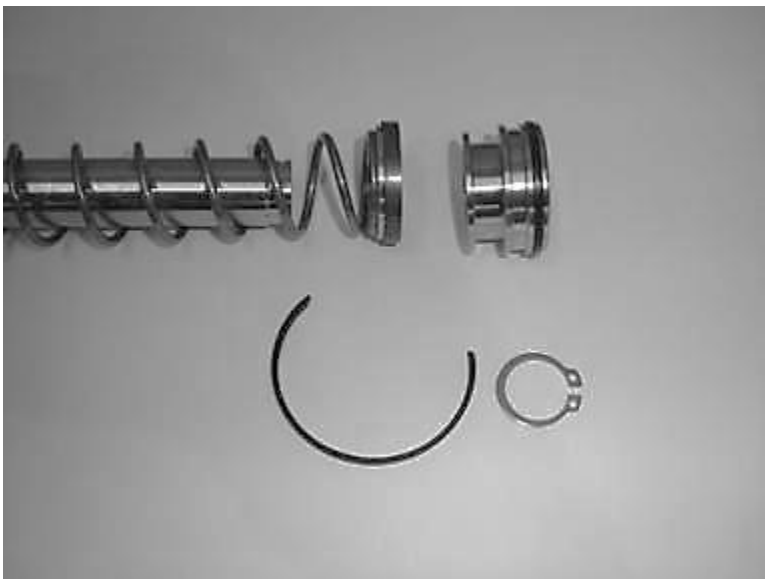

Figure 16

11. Look inside the piston, there is an O-Ring which seals the piston to the spray stem. This seal should be carefully removed using a small sharp pointer pressed into the O-Ring. The O-Ring must be discarded. See Figure 17

Figure 17

Maintenance (continued)

12. Remove the spring from the remaining body of the SSB Retractor.

13. Remove the Orientation Screw (if fitted) from the Spray Stem as shown in Figure 18 using a 2.5mm Allen key. Retain the screw as it will be required in the re-build.

    The Orientation Screw is fitted to ensure the orientation of the spray pattern. If the unit is fitted with a general coverage spray pattern the Orientation Screw may not be fitted.

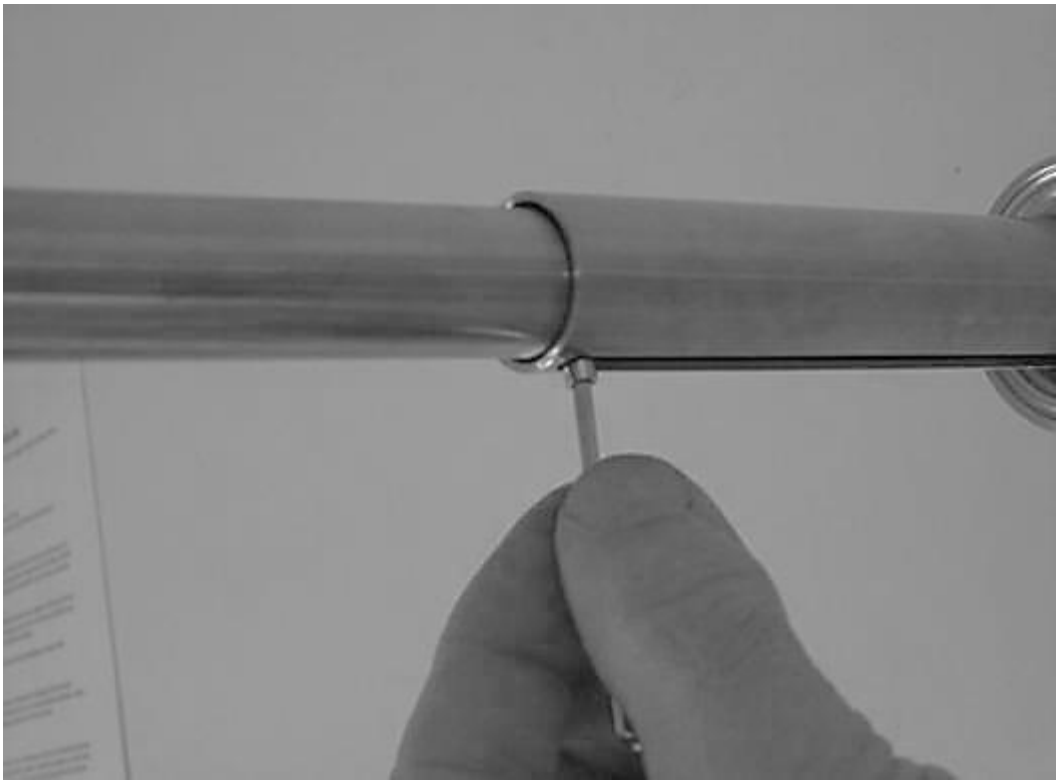

Figure 18

Maintenance (continued)

14. Once the orientation screw is removed, push the spray stem forward to reveal the spray ball. The Sprayball is retained by a 2mm diameter pin which passes through the neck. Straighten the end of the pin with a pair of pliers. See Figure 19.

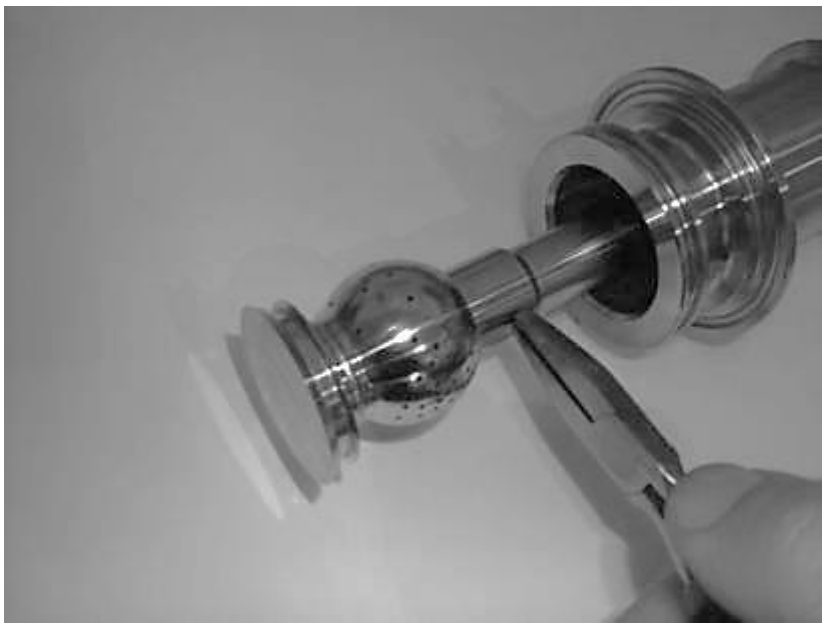

Figure 19

15. Once the Pin is removed the Sprayball can be unscrewed (anti clockwise) & removed. The Securing Pin must be discarded. See Figure 20.

Figure 20

Maintenance (continued)

16. The spray stem can now be drawn out of the main housing. See Figure 21.

Figure 21

17. To remove the sleeve from the main housing the 3mm dia. roll pin should be driven into the housing using a 2.5mm pin punch. (When rebuilding, a new pin must be used.) See Figure 22.

Figure 22

Maintenance (continued)

18. Remove the Sleeve from the main housing to reveal the O-Ring seal. This seal should be carefully removed with a small pair of long nosed pliers & discarded. See Figure 23.

Figure 23

19. The product seal can be seen in the large end of the sleeve. This Seal should be carefully removed using a pair of long nosed pliers & discarded.

Figure 24

Re-Build & fitment of New Service Repair Kit

The Service Repair Kit for the SSB Retractor unit is-

- TE75P287-90 for standard EPDM seals. For units TE75P230, TE75P231, TE75P250 &TE75P251
- TE75P287-94 for Perfuorolastomer seals. For units TE75P230-04, TE75P231-04, TE75P250-04, TE75P251-04, TE75Q230-04, TE75Q231-04, TE75Q250-04 & TE75Q251-04

Both of the above will also require a Seal Installation Tool Kit to help fit the seals
TE75P299 - Seal Installation Tool Kit.

1. Fitting Adaptor/Stem Seal Part TE75P542 (EPDM) or TE75P576 (FFKM)

Firstly take the Inlet Adaptor & Inlet Adaptor Stem Assembly. See Figure 25.

Figure 25

Re-Build & fitment of New Service Repair Kit (continued)

2. Carefully hold the Inlet Adaptor Body in soft jaws in a vice & using a 13mm spanner unscrew the Inlet Adaptor Stem (anti clockwise).

   The end of the stem is fitted with an O-ring. Remove the O-ring & thoroughly clean around the O-ring groove.

   Fit a new O-ring, Part No. TE75P542 or TE75P576 to the stem, wet the O-ring with clean water & refit the Inlet Adaptor Stem into the Inlet Adaptor Body. See Figure 26.

Figure 26

3. Fitting Adaptor Air Seal parts TE75P519 (EPDM) or TE75P549 (FFKM) & TE75P518

   Fit a new Air Seal to the Inlet Adaptor Stem. Firstly fit the Energising O-ring part TE75P519 or TE75P549 into the second groove in the stem. See Figure 27.

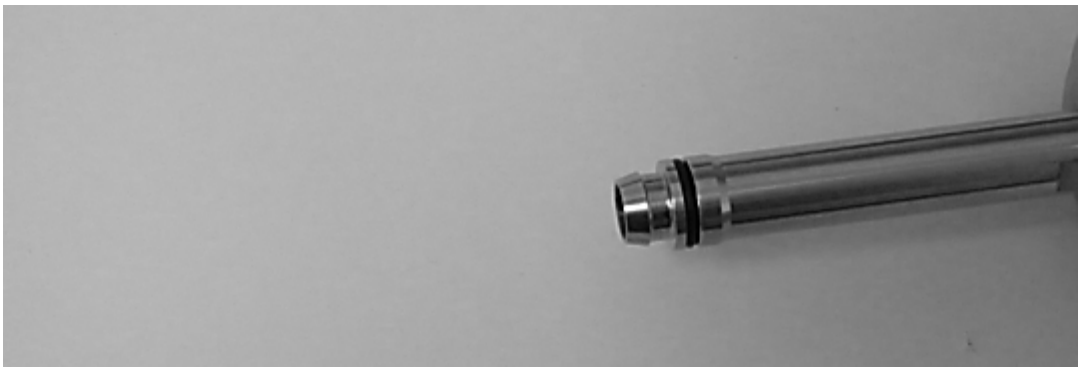

Figure 27

Re-Build & fitment of New Service Repair Kit (continued)

4 Place the Air Seal Fitment Tool Part TE75P593 over the end of the Inlet Adaptor Stem as shown below in Figure 28

This will allow the Air Seal part No. TE75P518 to be slid over the tool and into position on top of the Energising O-ring. Use the Pusher Tool Part TE75P594 to push seal into positions as shown in Figure 29.

1. Energising O-Ring
2. Air Seal
3. Fitment Tool

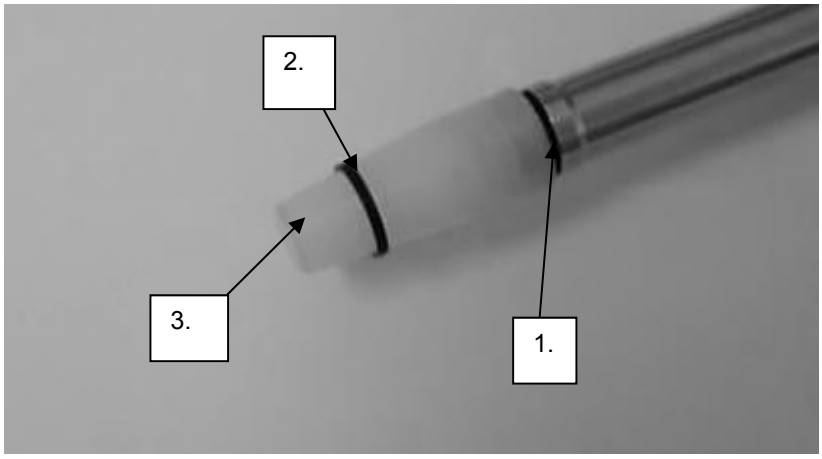

Figure 28

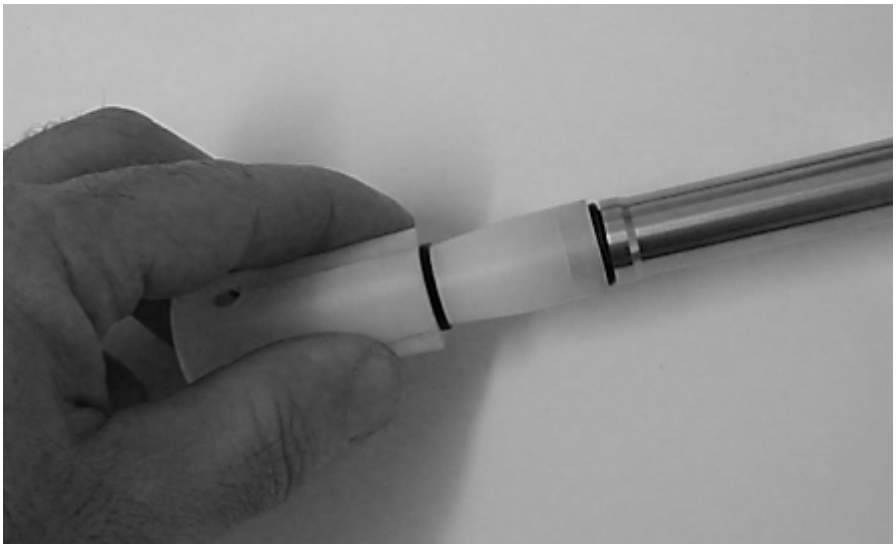

Figure 29

Re-Build & fitment of New Service Repair Kit (continued)

5. This process will stretch the seal & it will appear to be too big. Remove the tools & begin squeezing the seal with fingers to reduce its size. Move around the seal several times with fingers until the seal has returned almost to its original size.

   Carefully fit the Air Seal Re-sizing Tool part TE75P595 over the seal & leave for 5 minutes. See Figure 30.

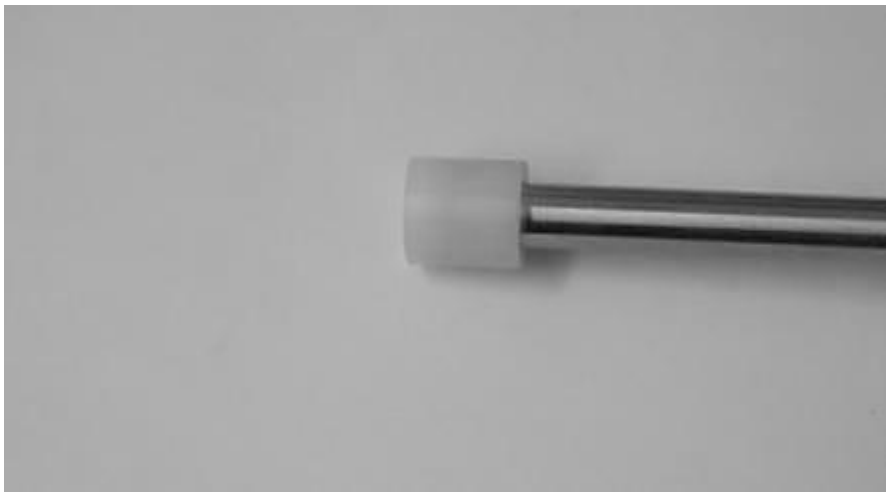

Figure 30

6. Fitting of Adaptor Product Seal Part No. TE75P517

   Place the Adaptor Product Seal part TE75P517 onto the end of the stem & carefully push the seal into position. See Figure 31.

Figure 31

Re-Build & fitment of New Service Repair Kit (continued)

7. Fitting of Stem Product Seal Part No. TE75P543

Place the Stem Product Seal in the end of the Sleeve. Position the seal so that one side of the seal enters the seal groove. Carefully work around the seal, pushing it into the groove. Care must be taken not to kink the seal. See Figure 32.

Figure 32

8. Fitting of Home Chamber/Sleeve Seal. Part No. TE75P540

Start one side of the O-ring in the O-ring Groove & gently stretch the O-ring into position. See Figure 33.

Figure 33

Re-Build & fitment of New Service Repair Kit (continued)

9. Fitting the Sleeve into the Home Chamber.

   Lightly wet the O-ring on the Sleeve with clean water & offer up to the Home Chamber. Rotate the Sleeve until the 3mm Spring Pin hole aligns with the hole on the Home Chamber.

   Push the Sleeve into the Home Chamber & check that the Spring Pin holes align.

   Place the Home Chamber on a piece of wood & tap the Spring Pin Part No. TE75P552 fully in using a pin punch.

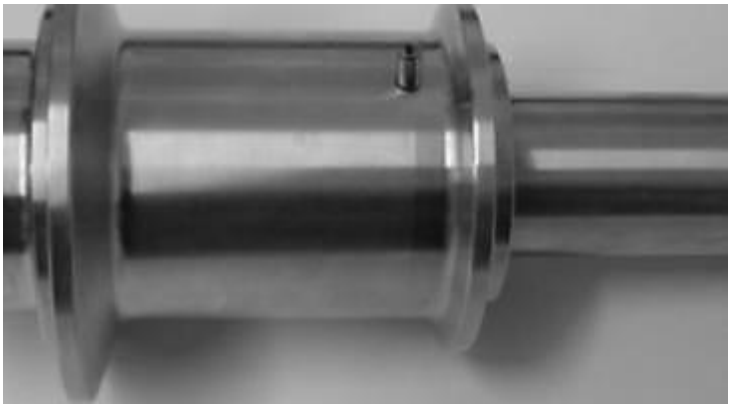

Figure 34

10. Fitting the Spray Stem.

    Take the Spray Stem & ensure it is clean. Check down the 16mm bore to ensure that there is no scratching or scoring.

    Carefully place the smaller threaded end of the stem through the Product Seal in the Home Chamber. Once aligned, gently tap the end of the stem with the palm of a hand to push the stem through the seal. See Figure 35.

Figure 35

Re-Build & fitment of New Service Repair Kit (continued)

11. Fitting the Spray ball to the Spray Stem.

    Ensuring it is clean, gently screw the Spray Ball all the way onto the Spray Stem. Slowly back off the ball on the thread until the small slot in the neck of the ball aligns with the hole in the Spray Stem.

    Pass the Ball Securing Pin part No. TE75P555 through the neck of the ball & bend the end with a pair of pliers approximately 10° to prevent it falling out. See Figure 36.

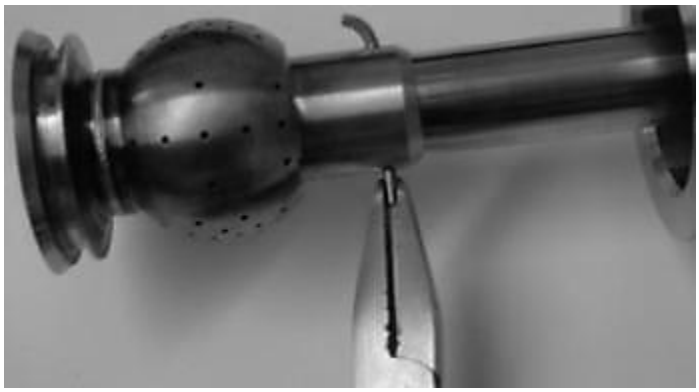

Figure 36

12. Fitting the Home Chamber/Stem Seal part No. TE75P538 or TE75P508.

    Place the Home Chamber/Stem Seal part No. TE75P538 or TE75P508 into the O-ring groove in the cap of the Spray Ball. See Figure 37.

Figure 37

Re-Build & fitment of New Service Repair Kit (continued)

13. Fitting the Spring.

Push the Spray Stem up so that the Spray Ball enters the Home Chamber.

If the Orientation Screw is required (if a targeted spray pattern is being used) rotate the Spray Stem until the M3 thread is visible through the guide slot in the Sleeve & screw in the Orientation Screw. Nip it up tight but take care not to over tighten as it is a fine thread.

See Figure 38.

Figure 38

14. Pass the Spring over the Spray Stem & Sleeve & ensure that the Spring is seated at the base of the sleeve. See Figure 39.

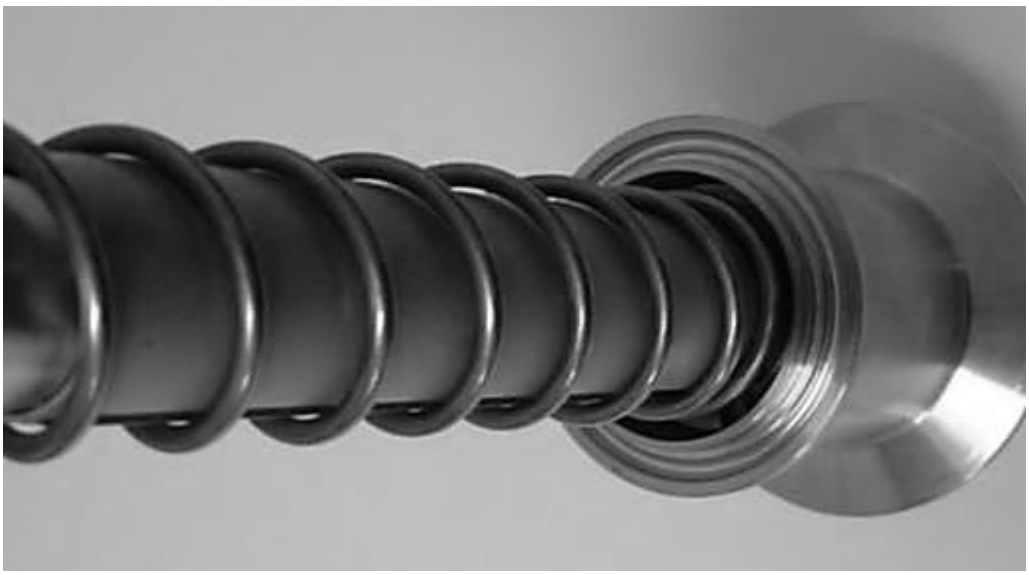

Figure 39

Re-Build & fitment of New Service Repair Kit (continued)

15. Fitting the Piston/Stem Seal Part No. TE75P541 or TE75P575.

    Fit the Piston/Stem Seal into the Internal O-ring groove inside the bore of the Piston.

    See Figure 40.

Figure 40

16. Fitting Piston Seal & Energising O-ring Parts TE75P515 & TE75P516 or TE75P546.

    Put one side of the O-ring (TE75P516 or TE75P546) into the O-ring groove of the Piston & carefully stretch the O-ring into the groove.

    Place one side of the Piston Air Seal Part TE75P515 into the groove on top of the Energising O-ring & carefully run the seal around the Piston so that it drops into the groove.

    See Figure 41.

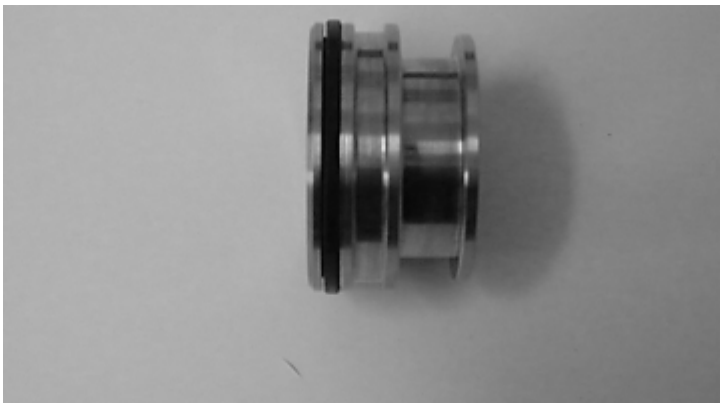

Figure 41

Re-Build & fitment of New Service Repair Kit (continued)

17. Fitting the Piston.

Stand the Retract-A-Ball assembly on the face of the Home Chamber so that the Spring points upwards. Place the Piston Spacer onto the Spring as shown. Place the Ring Magnet onto the Spring Spacer if required. The Magnet will only be required if Proximity Sensors are to be used to indicate open & closed positions. See Figure 42.

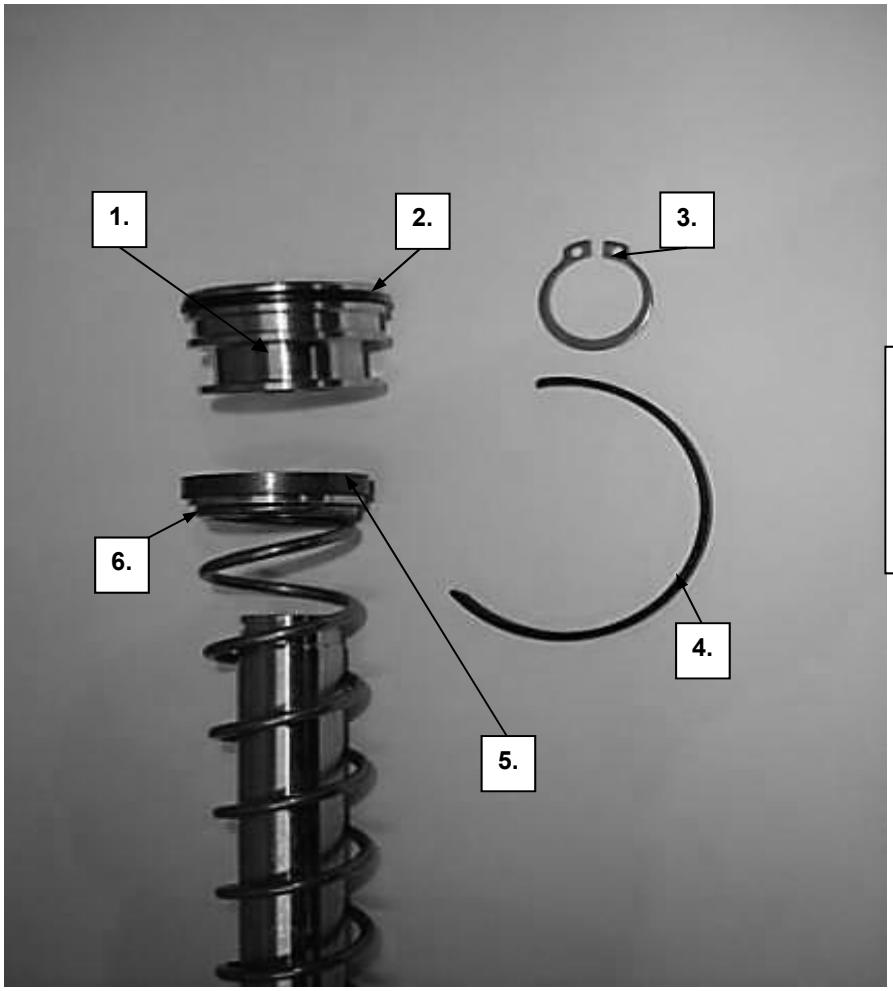

1. Piston.
2. Piston Air Seal.
3. Retaining Ring.
4. Piston Slide Ring.
5. Ring Magnet.
6. Piston Spacer.

Figure 42

Re-Build & fitment of New Service Repair Kit (continued)

18. Place the Piston onto the Piston Spacer & push downwards, compressing the Spring so that the Spray Stem enters the Piston. Push down until the Piston is fully seated.

Warning: DO NOT LET GO OF THE PISTON AS THE SPRING IS UNDER COMPRESSION.

Fit a new Retaining Ring Part No. TE75P587 to retain the Piston. See Figure 43.

Figure 43

19. Fitting the Main Body Tube.

While the Unit is still stood vertically, place one of the O-ring Seals (TE75P511) over the Spring & lower into position on the Home Chamber Flange. Follow this with the Solid Gasket Spacer Ring followed by the second O-ring seal (TE75P511). See Figure 44.

Figure 44

Re-Build & fitment of New Service Repair Kit (continued)

20. Ensure the Body Tube is clean & check the internal bore for scratches as this bore forms the air seal with the Piston.

    Carefully lower the Body Tube over the Piston & Air Seal, take great care not to damage the Air Seal. Stop once the Seal has just entered the Body Tube & the groove for the Piston Slide Ring is still visible.

    Wrap the Piston Slide Ring, part TE75P514 around the Piston groove & carefully lower the Body Tube until it meets the Solid Gasket Spacer ring on the Home Chamber.

    Fit the DIN 40 Body Clamp to retain the two parts. See Figure 45.

Figure 45

21. Fitting the Inlet Adaptor.

    Place the O-ring (TE75P511) onto the Flange of the Body Tube followed by the Solid Gasket Spacer Ring, then followed by the second O-ring (TE75P511). See Figure 46 below.

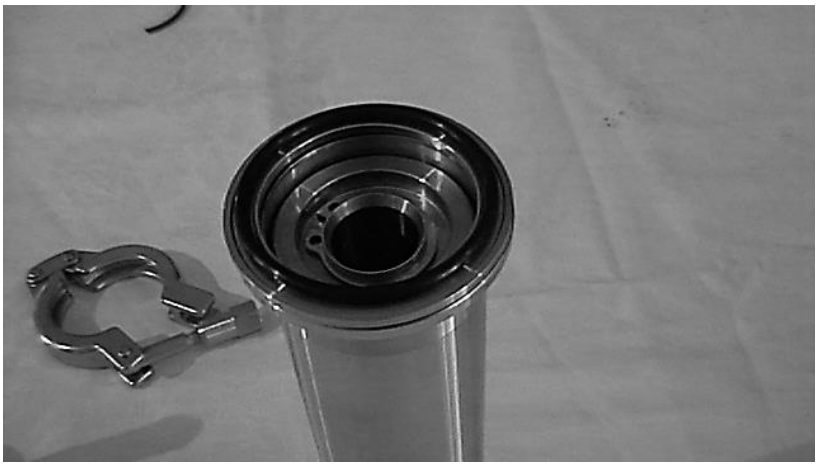

Figure 46

Re-Build & fitment of New Service Repair Kit (continued)

22. Carefully align the end of the Inlet Adaptor Stem in the end of the Spray Stem & push down. Ensure that both seals on the Inlet Adaptor Stem pass in the Spray Stem & do not snag. See Figure 47

    Use the Second DIN 40 Body Clamp to retain the Inlet Adaptor.

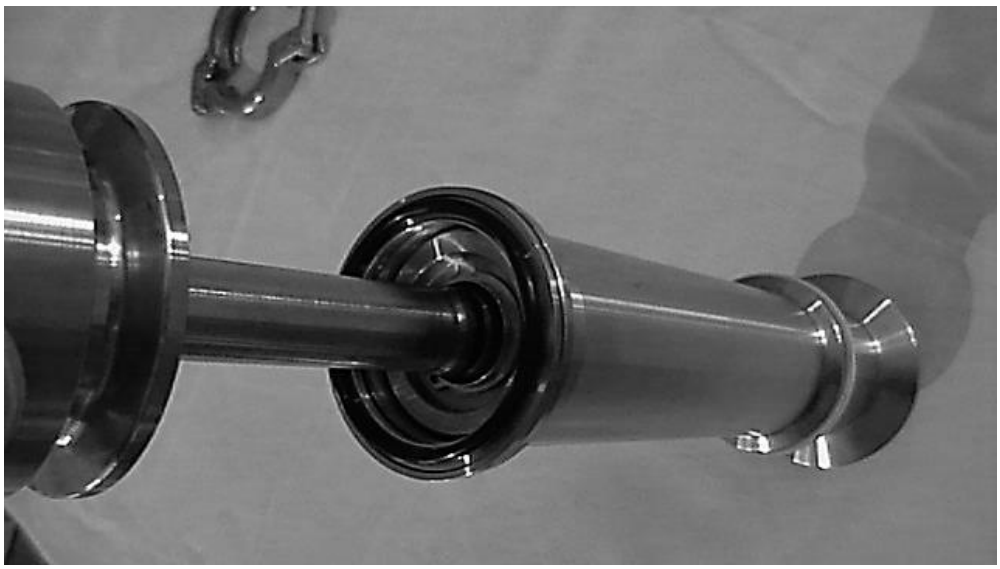

Figure 47

Re-Build & fitment of New Service Repair Kit (continued)

23. Fitting the Home Chamber Spigot Seal Part No. TE75P538 (EPDM) or TE75P508 (FFKM)

Carefully fit the O-ring in the O-ring groove at the front of the Home Chamber.

See Figure 48.

Figure 48

24. Test the Unit after Re-build.

Lay the Unit on the bench. Connect an air supply to the Air Connector fitted to the Inlet Adaptor. Apply a pressure of 4 Bar to open the SSB Retractor. Release the pressure & ensure the unit closes fully on the return spring.

Extend the unit again with 4 Bar pressure & close off the air supply so that the unit is held in the open position.

Measure the length of the extension with a ruler & leave the unit for half an hour. Re-measure to ensure there has been no movement which would indicate a leak in the air seals.

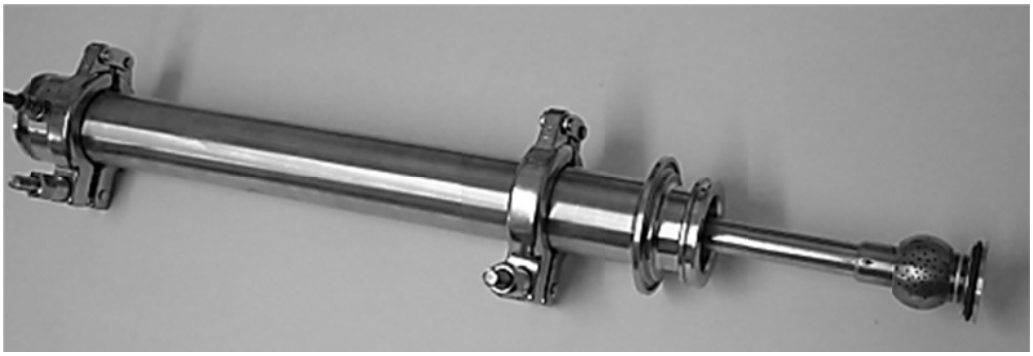

Figure 49

Standard Service Kits and Tools

Part Number TE75P287-90 for Units TE75P230, TE75P231, TE75P250 & TE75P251

The Standard Service Kit comprises of a full set of replacement seals, a new retaining ring and new roll pin. All the parts necessary to carry out a service or repair to the seals are included.
The Standard Service Kit seal materials are EPDM and carbon filled PTFE.

Standard Service Kit for Units TE75P230, TE75P231, TE75P250 & TE75P251
Part No. TE75P287-90

Part No.	Description	Qty.
TE75P587	Retaining Ring	1
TE75P552	Spring Pin	1
TE75P538	Home Chamber/Spigot Seal (EPDM)	1
TE75P539	Home Chamber/Stem Seal (EPDM)	1
TE75P550	Gasket-Home Chamber	1
TE75P543	Stem Product Seal	1
TE75P540	Home Chamber/Sleeve Seal (EPDM)	1
TE75P541	Piston/Stem Seal (EPDM)	1
TE75P514	Piston Slide Ring	1
TE75P515	Piston Seal	1
TE75P516	Energising O-Ring (EPDM)	1
TE75P542	Adaptor/Stem Seal (EPDM)	1
TE75P517	Adaptor Product Seal	1
TE75P518	Adaptor Air Seal	1
TE75P519	Energising O-Ring (EPDM)	1
TE75P511	O-Ring (EPDM)	4
TE75P555	Ball Securing Pin	1

Part Number TE75P287-94 for Units TE75P230-04, TE75P231-04, TE75P250-04, TE75P251-04, TE75Q230-04, TE75Q231-04, TE75Q250-04 & TE75Q251-04

However, if the unit was fitted with our ‘Special Trim’ seals required due to aggressive product or cleaning media, the service kit required is part number TE75P287-94.
The seal materials are FFKM (Perfluoroclastomer) and carbon filled PTFE.

Standard Service Kits and Tools (continued)

Standard Service Kit for Units TE75P230-04, TE75P231-04, TE75P250-04 & TE75P251-04 TE75Q230-04, TE75Q231-04, TE75Q250-04 & TE75Q251-04 "Special Trim" Part No. TE75P287-94		
Part No.	**Description**	**Qty.**
TE75P587	Retaining Ring	1
TE75P552	Spring Pin	1
TE75P508	Home Chamber/Spigot Seal (FFKM)	1
TE75P509	Home Chamber/Stem Seal (FFKM)	1
TE75P550	Gasket-Home Chamber	1
TE75P543	Stem Product Seal	1
TE75P574	Home Chamber/Sleeve Seal (FFKM)	1
TE75P575	Piston/Stem Seal (FFKM)	1
TE75P514	Piston Slide Ring	1
TE75P515	Piston Seal	1
TE75P546	Energising O-Ring (FFKM)	1
TE75P576	Adaptor/Stem Seal (FFKM)	1
TE75P517	Adaptor Product Seal	1
TE75P518	Adaptor Air Seal	1
TE75P549	Energising O-Ring (FFKM)	1
TE75P511	O-Ring (EPDM)	4
TE75P555	Ball Securing Pin	1

Tools, Part Number TE75P299

A number of simple installation tools are required to fit the new seals. All the required tools are included in this kit.

Tools, Article no. TE75P299		
Part No.	**Description**	**Qty.**
TE75P593	Air Seal Fitment Tool	1
TE75P594	Pusher Tool	1
TE75P595	Air Seal Re-sizing Tool	1

General information

How to Order Spare Parts

On the Cross Sectional Drawing as well as on all instruction drawings, the individual parts have a pos. no., which is the same on all drawings. From the pos. no. the part is easily identified in the Reference List of Parts, pages 28 and 31.

Individual parts should always be ordered from the Reference Lists of Parts, pages 28 and 31. Ref. no. and description should be clearly stated.

Please also quote the type of machine and serial no. This will help us to help you. The type and serial nos. are stamped on the Body of the tank cleaning machine.

Service and Repair

Upon every return of a product, no matter if for modifications or repair, it is necessary to contact your local Alfa Laval office to guarantee a quick execution of your request.

You will receive instructions regarding the return procedure from your local Alfa Laval office. Be sure to follow the instructions closely.

How to contact Alfa Laval Tank Equipment

For further information please feel free to contact:

Alfa Laval Tank Equipment

Alfa Laval Kolding A/S

31, Albuen - DK 6000 Kolding - Denmark

Registration number: 30938011

Tel switchboard: +45 79 32 22 00 - Fax switchboard: +45 79 32 25 80

www.toftejorg.com , www.alfalaval.dk - info.dk@alfalaval.com

Contact details for all countries are continually updated on our websites.

EC/EU Declaration of Conformity

EC Declaration of Conformity

The designated company

Alfa Laval Kolding A/S
Company name

Albuen 31, 6000 Kolding, Denmark
Address

+45 79 32 22 00
Phone no.

hereby declare that

Tank Cleaning Machine	SSB Retractor Stroke 60/120 Air-to-Spring
Designation	Type

From serial numbers from 2015-00001 to 2030-99999

is in conformity with the following regulations and directives with amendments:

- **FDA 21CFR§177**
- **The Machinery Directive 2006/42/EC**
  DS/EN ISO 12100:2010
- **The Pressure Directive 97/23/EC**
  According to its own volume and the rated pressure range the product is regarded an Article 3, paragraph 3 Equipment
- **The Equipment Explosive Atmospheres (ATEX) Directive 94/9/EC, valid until 2016-04-19**
- **The Equipment Explosive Atmospheres (ATEX) Directive 2014/34/EU, valid from 2016-04-20**
  (Applicable for machine certified as category 1 and 2 component, see machine engraving)
  DS/EN 13463-1:2009, DS/EN 13463-5:2011,
  DS/EN ISO/IEC 80079-34:2011, Annex A, paragraph A.5.3 Rotating mechines

EC Type Examination Certificate no. Baseefa 06ATEX0292X

Marking: Ex *II 1GD c TX°C Tamb -10°C to +140°C*
Ex *II 1GD c TX°C Tamb -10°C to +180°C*

Note: (T)ambient rating: -10°C to +140°C when fitted with EPDM seals
-10°C to +180°C when fitted with Perfluorolastomer seals.

Baseefa Ltd., Certification body number 1180, Rockhead Business Park
Staden Lane, Buxton, Derbyshire SK17 9RZ, United Kingdom

The person authorised to compile the technical file is the signer of this document.

QHSE Manager, Quality, Health and Safety & Environment	Annie Dahl	
Title	Name	Signature
ATEX Responsible Engineer	Denniz Høxbroe	
Title	Name	Signature
November 12, 2015	Kolding	
Date	Place	

This Declaration of Conformity replaces Declaration of Conformity dated 2012-01-16

ATEX-Special Conditions for safe use

ATEX CERTIFICATION

Ⓔx II 1GD c TX°C Tamb -10°C to +140°C
Ⓔx II 1GD c TX°C Tamb -10°C to +180°C

BASEEFA CUSTOMER REFERENCE No. 5322
PROJECT FILE No. 11/0682

Special Condition for Safe Use

1. The Unit shall be connected to a fully earthed pipeline/duct or tank/vessel.
2. The pipeline/duct shall not exceed a diameter of 3m, and the tank/vessel shall not exceed 100m³.
3. The air operated unit shall only be operated with inert gas or clean air.
4. The unit shall only be purge using inert gas or clean air.
5. Do not allow the unit to be operated when process media is in the pipeline or tank.
6. Do not allow the air pressure to exceed 5.5 Bar.
7. Do not allow the cleaning media to exceed 4 Bar.
8. When an external sensor is fitted to indicate the open or closed position it shall be suitable for the zone of use.

This product fully complies to ATEX category 1 as long as the 8 special conditions above are adhered to.
Please read the above conditions prior to installation & ensure that all conditions are met.

Explanation of T (temperature) rating.
The ATEX classification

Ⓔx II 1GD c TX°C Tamb -10°C to +140°C when fitted with EPDM seals
Ⓔx II 1GD c TX°C Tamb -10°C to +180°C when fitted with Perfluorolastomer seals

Shows the temperature rating as T(Variable).
This is because the SSB Retractor max temperature that it will reach will be dependent upon the temperature of the production process or the temperature of the CIP media which passes through it.

How to contact Alfa Laval
Contact details for all countries are
continually updated on our website.
Please visit www.alfalaval.com to access the information directly.

© Alfa Laval Corporate AB
This document and its contents is owned by Alfa Laval Corporate AB and protected by laws governing intellectual property and thereto related rights. It is the responsibility of the user of this document to comply with all applicable intellectual property laws. Without limiting any rights related to this document, no part of this document may be copied, reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the expressed permission of Alfa Laval Corporate AB. Alfa Laval Corporate AB will enforce its rights related to this document to the fullest extent of the law, including the seeking of criminal prosecution.