



Performance Curves





Alfa Laval LKH-120/P Multi-Stage, 50/60 Hz

Motor:	3000 rpm. synchron.
Tolerance:	±5%
Impeller, LKH-122/P:	206 mm
Impeller, LKH-123/P:	206 mm
Impeller, LKH-124/P:	206 mm
Pump inlet, Dia.:	76 mm, DN 80
Pump outlet, Dia.:	63.5 mm, DN 65

NOTE! The curves refer to max. motor: LKH-122/P, 22 kW, 2950 rpm. asynchr., 50 Hz LKH-123/P, 37 kW 2940 rpm. asynchr., 50 Hz LKH-124/P, 45 kW 2955 rpm. asynchr., 50 Hz For smaller motors, reduce head (H) by 3% For inlet pressure > 10 bar, reduce head (H) by 5%

Performance data refer to water at 20 °C.

DO NOT FORGET THE SAFETY FACTOR.

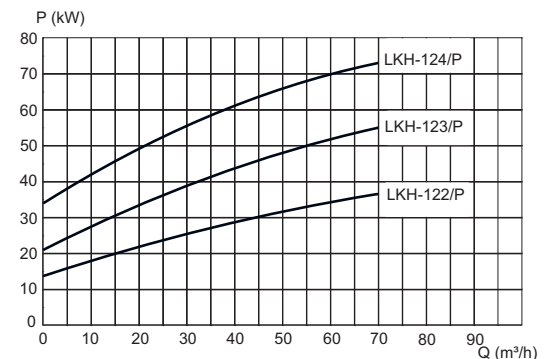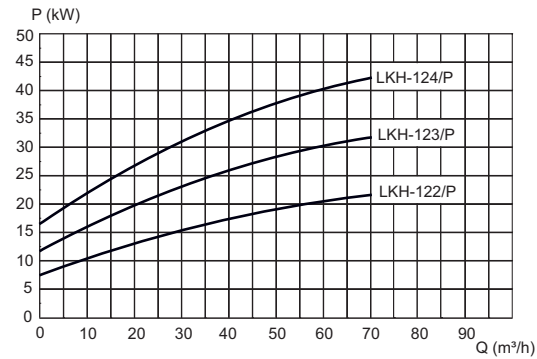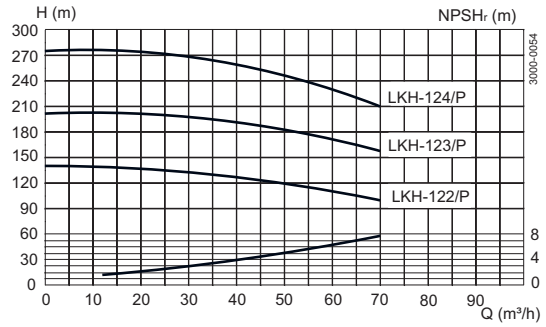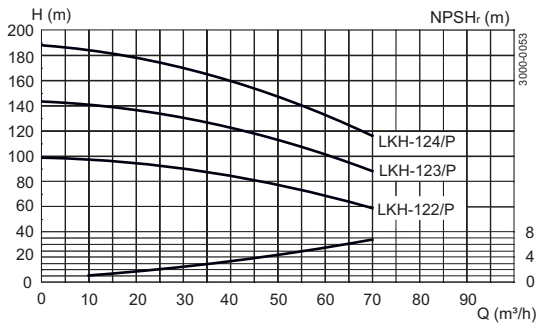

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01072EN 1507

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.